
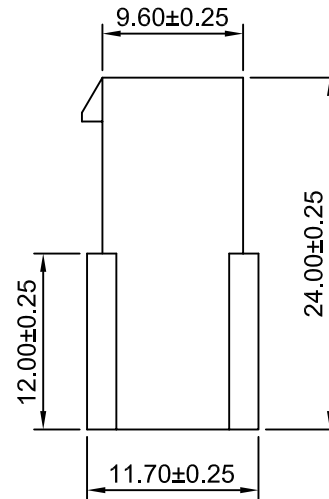
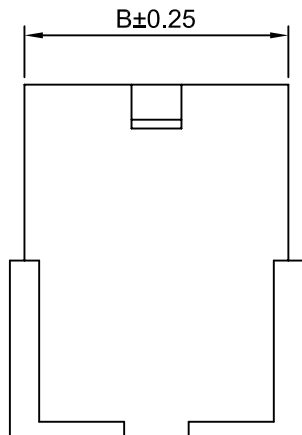


Ordering Information:

C4201HM-2xXP-A - ** - **
 1 2 3

- 1.Part No.
- 2.Material:
 (blank);Nylon 66 UL94V-2
 V0:Nylon 66 UL94V-0
 GWT:Nylon 66 UL94V-0,GWT 750°C
- 3.Color:
 (blank);Natural
 WH:White
 BK:Black
 RD:Red
 YL:Yellow
 BL:Blue

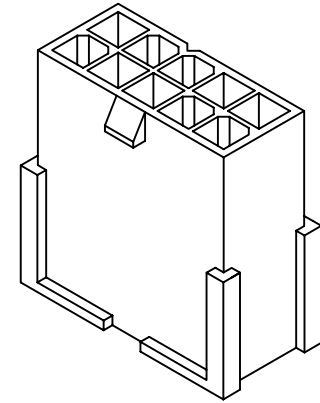

SPECIFICATIONS:

Current Rating: 9A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2 (Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

Beijing Hongli Kumpeng International Trade Co., Ltd.

Unit mm	Scale 2:1	Sheet 1 of 1
Draw BY: LIZQ	Approved : GONGYB	

Title :
4.20mm PITCH
DUAL ROW HOUSING

A1	Change tolerance	2014.07.25	General Tolerance	ANGLE± 	
A0	NEW RELEEASE	2005.05.10			x.x≤0.25
REV	DESCRIPTION	DATE			x.xx≤0.20

DRAW NO :
HLB-01-HM-2xXP-A 124 REV
 A0