
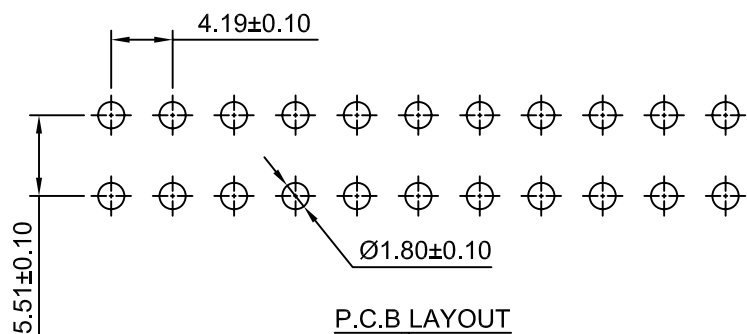
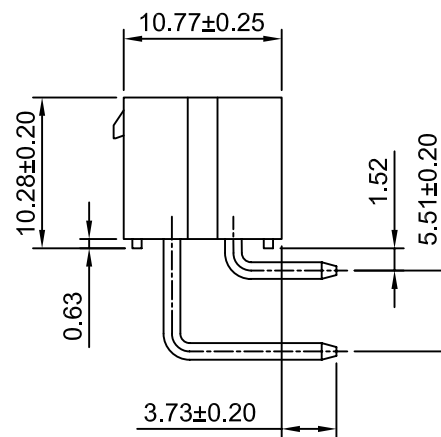


2x2P

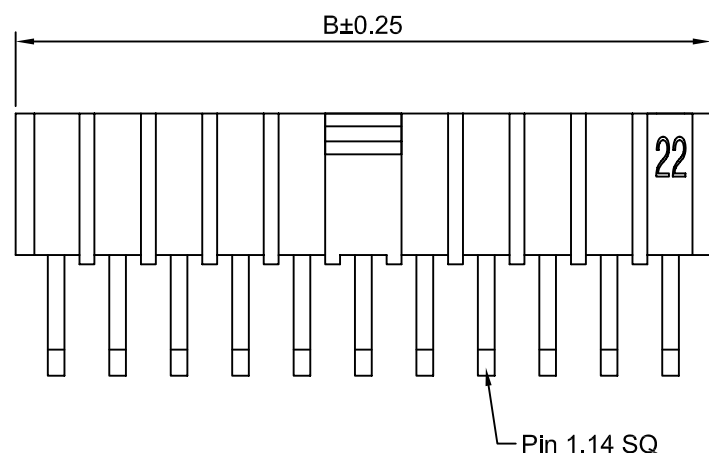

SPECIFICATIONS:

Current Rating: 9A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -55°C ~ +105°C
 Contact Resistance: 10mΩ Max
 After environmental testing: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin over Nickel
 Material: LCP , UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	4.19	9.40	2x9P	33.52	38.73
2x3P	8.38	13.59	2x10P	37.71	42.92
2x4P	12.57	17.78	2x11P	41.90	47.11
2x5P	16.76	21.97	2x12P	46.09	51.30
2x6P	20.95	26.16	2x13P	50.28	55.49
2x7P	25.14	30.35	2x14P	54.47	59.68
2x8P	29.33	34.54	2x15P	58.66	63.87

Beijing Hongli Kunpeng International Trade Co., Ltd.

Unit	Scale	Sheet
mm	2:1	1 of 1
Draw BY:	Approved :	
Jack Yin	GONGYB	

Title :
 4.19mm PITCH
 DUAL ROW WAFER

A0	NEW RELEASE	2015.03.11
REV	DESCRIPTION	DATE

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xx±0.15	

DRAW NO :
 HLB-01-WRS-2xXP 112
 REV
 A1