

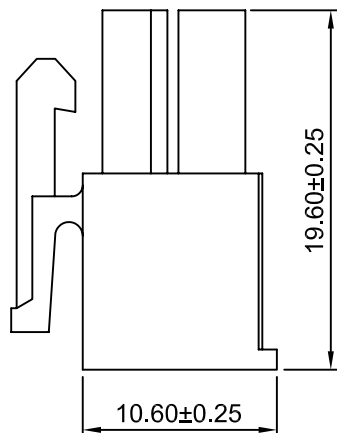


2x1P

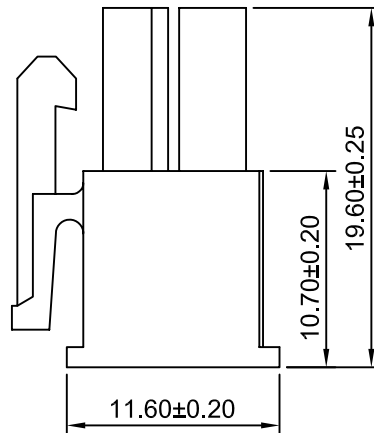

2x2P

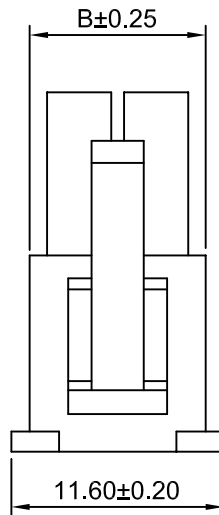

Ordering Information:
 C4201HFC-2xXP - ** - **
 1 2 3

- 1.Part No.
- 2.Material:
 (Blank);Nylon 66,UL94V-2/Natural
 V0:Nylon 66,UL94V-0/White
 GWT:Nylon 66 UL94V-0,GWT 750°C
- 3.Color:
 (Blank);Natural
 WH:White
 BK:Black

SPECIFICATIONS:
 Current Rating: 9A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2 (Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x2P	4.20	9.60

Beijing Hongli Kungpeng International Trade Co., Ltd.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :
 4.20mm PITCH
 DUAL ROW HOUSING

REV	DESCRIPTION	DATE	General Tolerance	ANGLE±
A1	Version update	2017.12.07	x.x≤0.25	
A0	NEW RELEASE	2015.03.05	x.xx≤0.20	
			x.xxx≤0.15	

DRAW NO :
 HLB-01-HFC-2xXP 77
 REV A1