


①
Ordering Information:
C4201WRB- F-2xXP - **
1 2

1.Part No.
2.Finish:

(Blank):Tin over Nickel (Ni:50u" /Tin:100u")
G:Gold over Nickel(Au:1u" /Ni:50u" /Tin:100u")
G15:Gold over Nickel(Au:15u" /Ni:50u" /Tin:100u")
G30:Gold over Nickel(Au:30u" /Ni:50u" /Tin:100u")

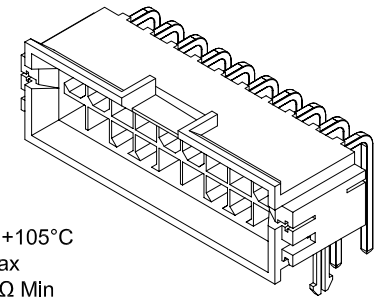

SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass
Pin Finish: See The ①
Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	4.20	18.81	2x8P	29.40	44.01
2x3P	8.40	23.01	2x9P	33.60	48.21
2x4P	12.60	27.21	2x10P	37.80	52.41
2x5P	16.80	31.41	2x11P	42.00	56.61
2x6P	21.00	35.61	2x12P	46.20	60.81
2x7P	25.20	39.81			

Beijing Hongli Kungpeng International Trade Co., Ltd.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
Draw BY:	Approved :	
LIZQ	GONGYB	

Title :
**4.20mm PITCH
90° Dual Row Wafer
With Foot**

General Tolerance	
x.x≤0.25	ANGLE±
x.xx≤0.20	
x.xxx≤0.15	

DRAW NO :
HLB-01-WRB-F-2xXP 66

A0	NEW RELEASE	2015.05.10
REV	DESCRIPTION	DATE

REV
A0