
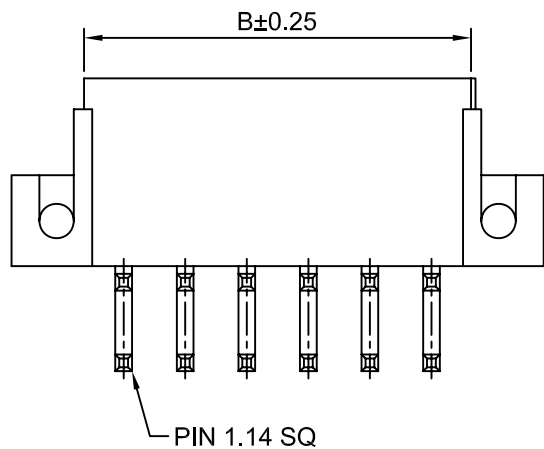


TAPPING SCREW(M3)


**RECOMMENDED INSTALLATION**

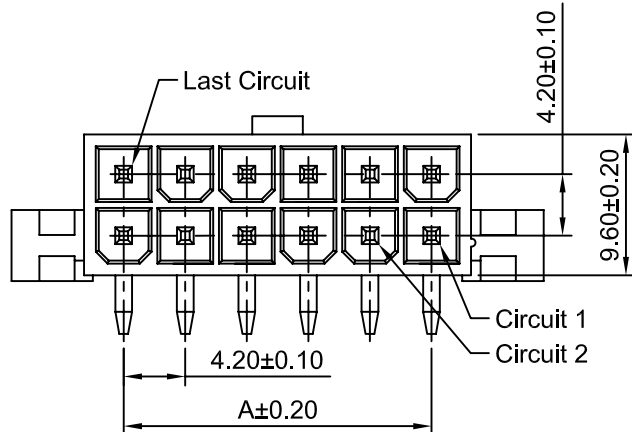


**Ordering Information:**

C4201WR-E-2xXP - \*\*\* - \*\* - \*\*\*  
1 2 3 4

- 1.Part No.
- 2.Material:  
(blank):Nylon,66 UL94V-2  
V0:Nylon 66,UL94V-0  
GWT:Nylon 66,UL94V-0,GWT 750°C
- 3.Color:  
(blank):Natural  
WH:White  
BK:Black  
RD:Red  
YL:Yellow  
BL:Blue
- 4.Finish:  
(blank):Tin over Nickel  
G:Gold over Nickel(1u")  
G3:Gold over Nickel(3u")  
G15:Gold over Nickel(15u")  
G30:Gold over Nickel(30u")

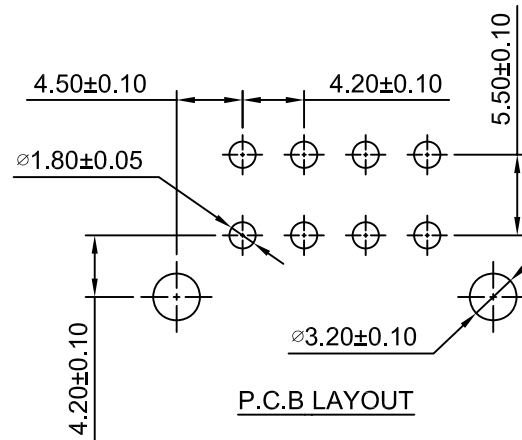

**P.C.B LAYOUT**




**SPECIFICATIONS:**

Current Rating: 9A AC,DC  
Voltage Rating: 600V AC,DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 10mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1500V AC/minute  
Pin Material: Brass/Tin over Nickel  
Material: Nylon 66,UL94V-2(Natural)

**Ordering Information & Dimensions**

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

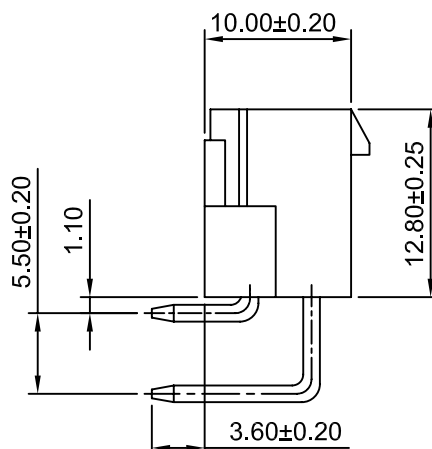

Beijing Hongli Kumpeng International Trade Co., Ltd.

Unit	Scale	Sheet
mm	2:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :  
**4.20mm PITCH  
90° Dual Row Wafer With Ear**

General Tolerance		
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

DRAW NO : <b>HLB-01-WR-E-2xXP 63</b>		REV A0
-----------------------------------------	--	-----------