




3P~12P

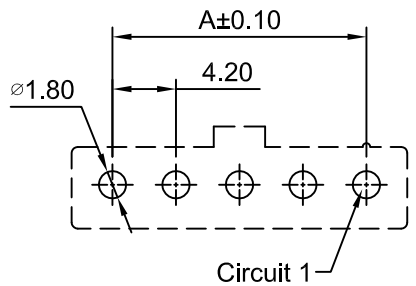

P.C.B LAYOUT
TOLERANCE:±0.05

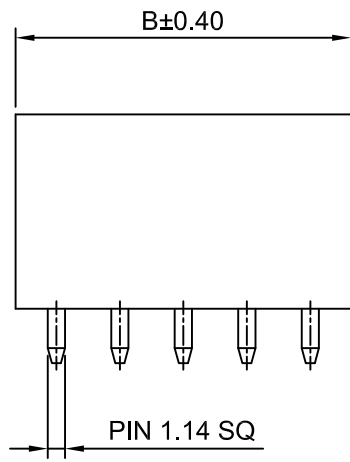


2P

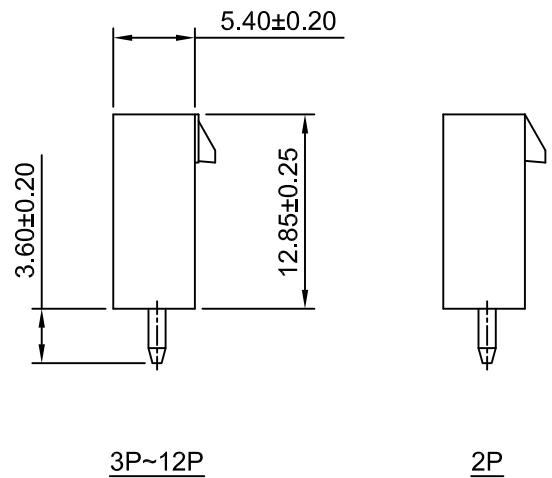

Ordering Information:
C4201WV-XP - *** - ** - ***
1 2 3 4

1.Part No.
2.Material:
(blank): Nylon 66,UL94V-2(Natural)
V0: Nylon 66,UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.


3.Color:
(blank): Natural
BK: Black
RD: Red
YL: Yellow
BL: Blue
4.Finish:
(blank): Tin over Nickel
G: Gold over Nickel(Au:1u")
G3: Gold over Nickel(Au:3u")
G15: Gold over Nickel(Au:15u",Mating Area)
G30: Gold over Nickel(Au:30u",Mating Area)



SPECIFICATIONS:
Current Rating: 13A AC,DC(Max)
(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass
Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

Part No.	Dimensions(mm)	
	A	B
C4201WV-2P	4.20	9.60
C4201WV-3P	8.40	13.80
C4201WV-4P	12.60	18.00
C4201WV-5P	16.80	22.20
C4201WV-6P	21.00	26.40
C4201WV-7P	25.20	30.60
C4201WV-8P	29.40	34.80
C4201WV-9P	33.60	39.00
C4201WV-10P	37.80	43.20
C4201WV-11P	42.00	47.40
C4201WV-12P	46.20	51.60



Beijing Hongli Kumpeng International Trade Co., Ltd.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	4.20mm PITCH 180° SINGLE ROW DIP WAFER	
A4	ADD THE DRAWING OF 2P	2020.08.17	DRN	CHK
A3	CHANGE THE TOLERANCE	2020.05.28	Dengchun Yi	APVD
A2	CHANGE THE DRAWING	2018.03.12	DianKui Wan	Jack Yin
A1	DRAWING CHANGES	2017.09.12	THIRD ANGLE PROJECTION	
A0	NEW RELEASE	2005.05.10	DRAWING NO	
REV	DESCRIPTION	DATE	HLB-01-WV-XP 60	
			REV A4	