
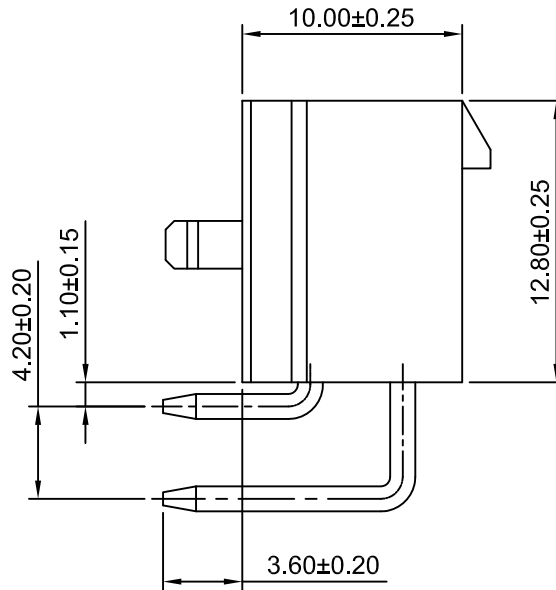


P.C.B LAYOUT

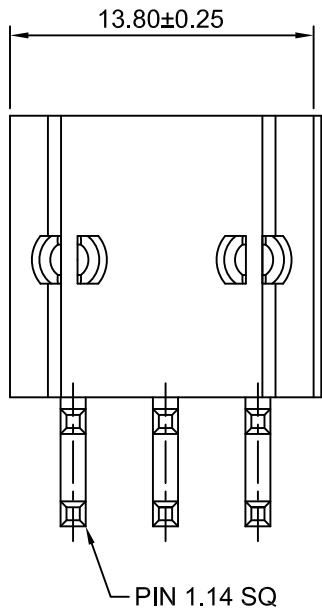

Ordering Information:

C4201WR-F-2x3P-A - *** - ***
 1 2 3

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2

V0:Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Finish:


(blank):Tin over Nickel

G:Gold over Nickel(1u")

G3:Gold over Nickel(3u")

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

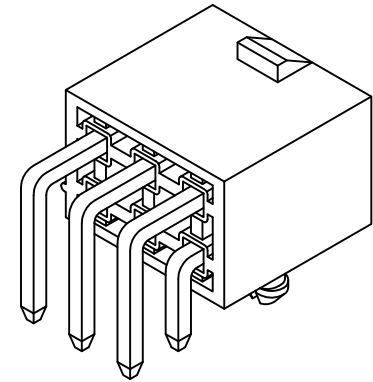

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Black)

Beijing Hongli Kumpeng International Trade Co., Ltd.

| | | |
|------|-------|--------|
| Unit | Scale | Sheet |
| mm | 3:1 | 1 of 1 |

| | |
|----------|------------|
| Draw BY: | Approved : |
| Tony Su | Jack Yin |

General Tolerance

| | |
|------------|--------|
| x.x≤0.25 | ANGLE± |
| x.xx≤0.20 | ⊕ ⊖ |
| x.xxx≤0.15 | |

Title : 4.20mm PITCH
 90° DUAL ROW WAFER
 WITH FOOT
 - SPECIAL TYPE

| | | |
|-----|-------------|------------|
| A0 | NEW RELEASE | 2009.12.24 |
| REV | DESCRIPTION | DATE |

DRAW NO : HLB-01-WR-F-2x3P-A 58 REV A0