



REV	DESCRIPTION	DATE
A0	NEW RELEASE	2009.05.10
A1	CHANGE THE DRAWING	2017.11.04
A2	CHANGE THE CURRENT RATING	2018.12.14
A3	CHANGE THE DRAWING	2019.07.22
A4	CHANGE THE DRAWING	2020.11.11

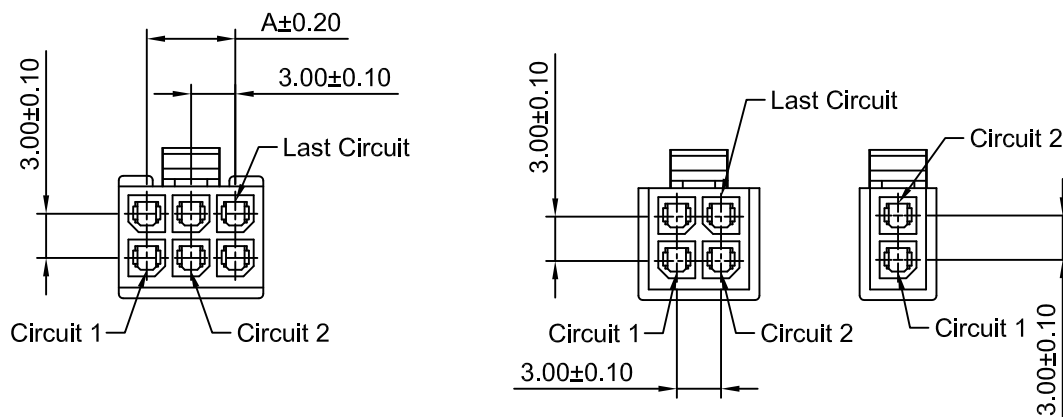

### Ordering Information:

C3030HF-2xXP - \*\*\*  
1 2

1. Part No.

2. Material:

(blank): Nylon 66, UL94V-0

GW: Nylon 66, UL94V-0,

IEC 60335-1, 5th Edition

Glow Wire Capable.

### SPECIFICATIONS:

Current Rating: 8.5A AC, DC (MAX)

Voltage Rating: 600V AC, DC

Temperature Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66, UL94V-0 (Black)

### Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C3030HF-2x2P	3.00	6.85
C3030HF-2x3P	6.00	9.85
C3030HF-2x4P	9.00	12.85
C3030HF-2x5P	12.00	15.85
C3030HF-2x6P	15.00	18.85
C3030HF-2x7P	18.00	21.85
C3030HF-2x8P	21.00	24.85
C3030HF-2x9P	24.00	27.85
C3030HF-2x10P	27.00	30.85
C3030HF-2x11P	30.00	33.85
C3030HF-2x12P	33.00	36.85

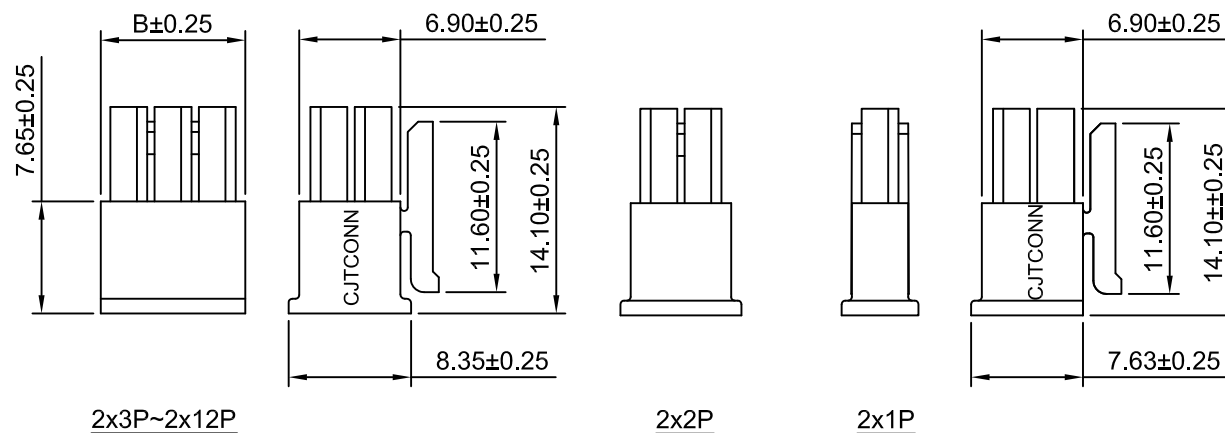

Beijing Hongli Kunpeng International Trade Co., Ltd.

Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	3.00mm PITCH DUAL ROW HOUSING
DRWN	CHK'D	APPR	
Dengchun Yi	Dlankul Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			HLB-30-HF-2xXP 47
			REV A4