

Ordering Information:

C3030HMA-XP - **
1 2

1.Part No.

2.Material:

(Blank):Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,IEC 60335-1,5th Edition

Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 12.5A AC,DC (AWG #18 MAX)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(Black)


Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.00	6.85	8P	21.00	24.85
3P	6.00	9.85	9P	24.00	27.85
4P	9.00	12.85	10P	27.00	30.85
5P	12.00	15.85	11P	30.00	33.85
6P	15.00	18.85	12P	33.00	36.85
7P	18.00	21.85			


Beijing Hongli Kumpeng International Trade Co., Ltd.

Unit	Scale	Sheet	TITLE
mm	4:1	1 of 2	
DRWN	CHK'D	APPR	
Xu Lei	Dlankul Wan	Jack Yin	3.00mm Pitch Single Row Housing
General Tolerances			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION
REV			DESCRIPTION
DATE			HLB-30-HMA-XP 38
			REV A3


A3	CHANGE THE DRAWING	2022.01.14
A2	CHANGE THE DRAWING	2019.12.27
A1	MODIFY DRAWING	2019.09.20
A0	NEW RELEASE	2018.12.15
REV	DESCRIPTION	DATE




2P

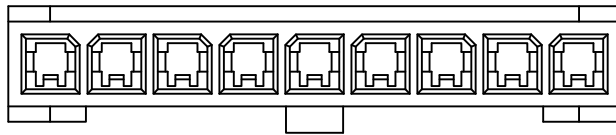


9P

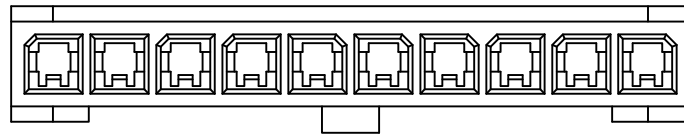


10P




3P

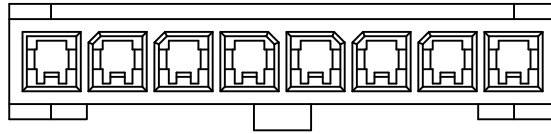


8P

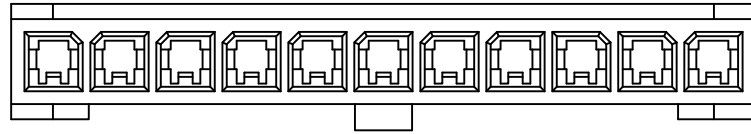


11P




4P

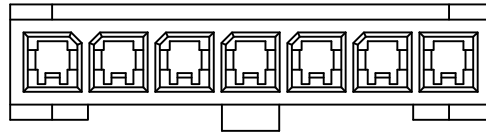


7P

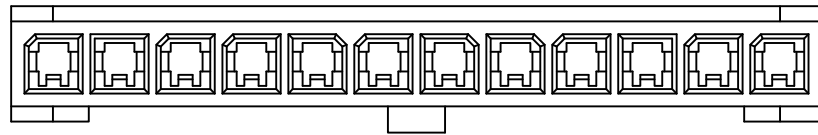

12P

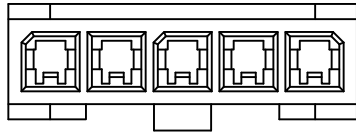

5P

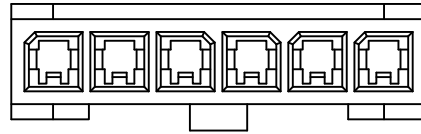

6P

Beijing Hongli Kunpeng International Trade Co., Ltd.

Unit	Scale	Sheet	TITLE
mm	3:1	2 of 2	3.00mm Pitch Single Row Housing
DRWN	CHK'D	APPR	
Xu Lei	Diankui Wan	Jack Yin	DRAWING NO.
General Tolerances			THIRD ANGLE PROJECTION
x.x±0.25 x.xx±0.20 x.xxx±0.15			HLB-30-HMA-XP 38
ANGLES ±1°			
REV	DESCRIPTION	DATE	REV A3

A3	CHANGE THE DRAWING	2022.01.14
A2	CHANGE THE DRAWING	2019.12.27
A1	MODIFY DRAWING	2019.09.20
A0	NEW RELEASE	2018.12.15
REV	DESCRIPTION	DATE