

Ordering Information:

C3030WVA-S-2xXP - **
1 2

1.Part No.

2.Finish:

(blank):Tin over Nickel

G:Gold-flash

G15:15µin (0.38µm) MIN.Select Gold
100µin (2.54µm) MIN.Select Tin

G30:30µin (0.76µm) MIN.Select Gold
100µin (2.54µm) MIN.Select Tin

SPECIFICATIONS:

Current Rating: 12.5A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +265°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min



Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material:Nylon 46,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x1P	---	6.70	6.60	2x7P	18.00	24.70	6.60
2x2P	3.00	9.70	6.60	2x8P	21.00	27.70	12.00
2x3P	6.00	12.70	6.60	2x9P	24.00	30.70	12.00
2x4P	9.00	15.70	6.60	2x10P	27.00	33.70	12.00
2x5P	12.00	18.70	6.60	2x11P	30.00	36.70	12.00
2x6P	15.00	21.70	6.60	2x12P	33.00	39.70	12.00

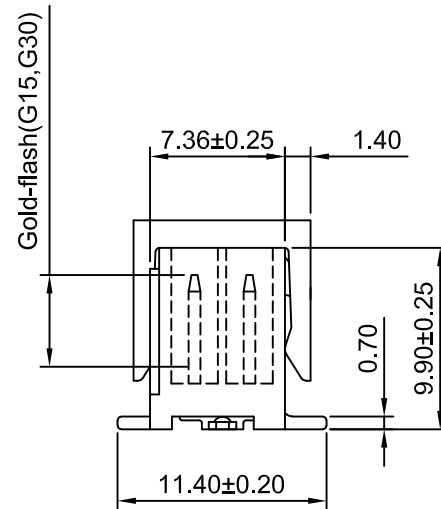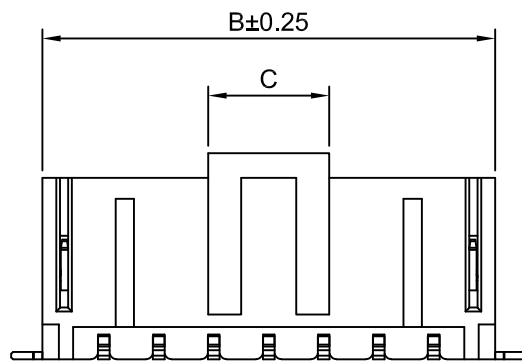

Beijing Hongli Kungpeng International Trade Co., Ltd.

Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 1	3.00mm PITCH VERTICAL Dual Row WAFER - SMT TYPE
DRWN	CHK'D	APPR	
Xu Lei	DlanKul Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
A1	CHANGE THE DRAWING	2022.01.15	DRAWING NO. HLB-30-WVA-S-2xXP 11
A0	NEW RELEASE	2016.12.06	
REV	DESCRIPTION	DATE	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A1