

Ordering Information:  
**C3030WVB-2xXP-9T - \*\*\***  
 1 2



1.Part NO.  
 2.Finish:  
 (blank):Tin over Nickel  
 G:Gold over Nickel(1u")  
 G3:Gold over Nickel(3u")  
 G15:Gold over Nickel(15u",Mating Area)  
 G30:Gold over Nickel(30u",Mating Area)

**SPECIFICATIONS:**




Current Rating: 12.5A AC,DC (MAX)  
 Voltage Rating: 600V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass  
 Material: Nylon 9T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C3030WVB-2x2P-9T	3.00	13.00
C3030WVB-2x3P-9T	6.00	16.00
C3030WVB-2x4P-9T	9.00	19.00
C3030WVB-2x5P-9T	12.00	22.00
C3030WVB-2x6P-9T	15.00	25.00
C3030WVB-2x7P-9T	18.00	28.00
C3030WVB-2x8P-9T	21.00	31.00
C3030WVB-2x9P-9T	24.00	34.00
C3030WVB-2x10P-9T	27.00	37.00
C3030WVB-2x11P-9T	30.00	40.00
C3030WVB-2x12P-9T	33.00	43.00

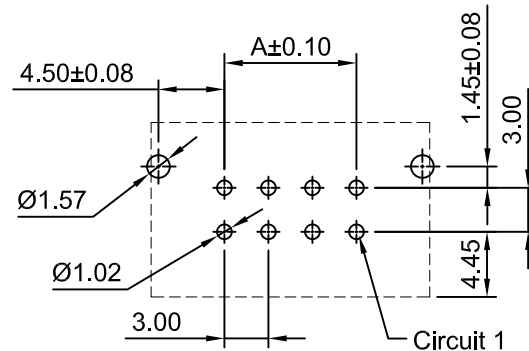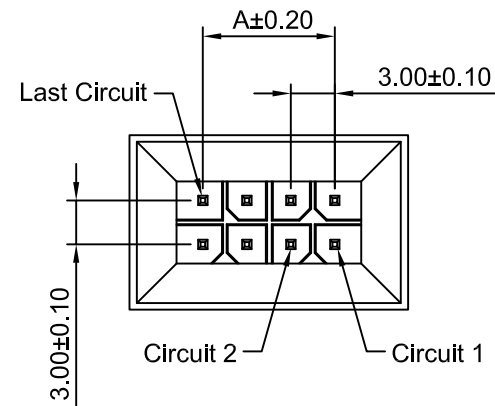

**P.C.B LAOUT (TOP VIEW)**  
**TOLERANCE:±0.05**

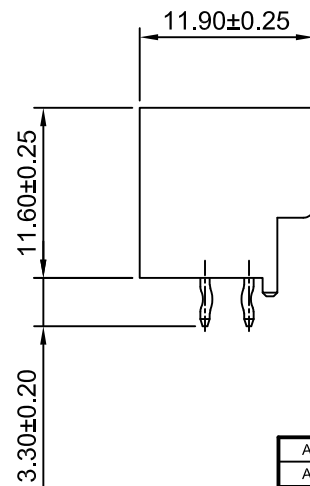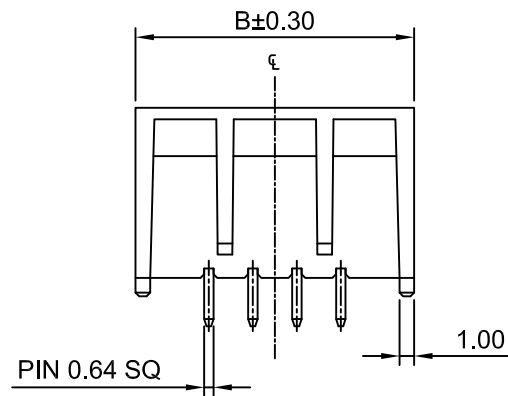

Beijing Hongli Kunpeng International Trade Co., Ltd.

A7	CHANGE THE INFORMATION	2022.01.15
A6	CHANGE THE INFORMATION	2021.02.26
A5	CHANGE THE INFORMATION	2020.08.18
A4	ADD THE SIZE	2020.06.30
A3	CHANGE TEH INFORMATION	2020.05.26
A2	ADD THE MATERIAL NYLON 6T	2019.04.30
A1	CHANGE THE CURRENT RATING	2018.12.26
A0	NEW RELEASE	2013.02.27
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	2:1	1 of 1
DRWN	CHK'D	APPR
Xu Lei	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		

TITLE	
3.00mm PITCH VERTICAL DUAL ROW DIP WAFER	
DRAWING NO.	REV
HLB-30-WVB-2xXP 10	A7