
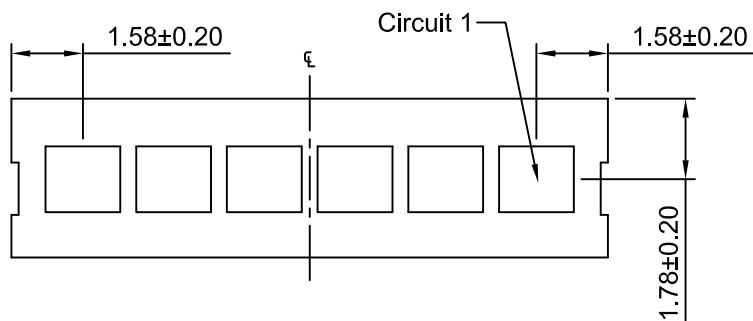
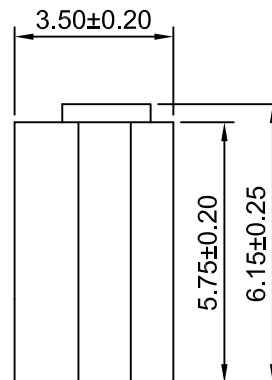


SPECIFICATIONS:
 Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
B2011H-2P	2.00	5.20
B2011H-3P	4.00	7.20
B2011H-4P	6.00	9.20
B2011H-5P	8.00	11.20
B2011H-6P	10.00	13.20
B2011H-7P	12.00	15.20
B2011H-8P	14.00	17.20
B2011H-9P	16.00	19.20
B2011H-10P	18.00	21.20
B2011H-11P	20.00	23.20
B2011H-12P	22.00	25.20
B2011H-13P	24.00	27.20
B2011H-14P	26.00	29.20
B2011H-15P	28.00	31.20
B2011H-16P	30.00	33.20

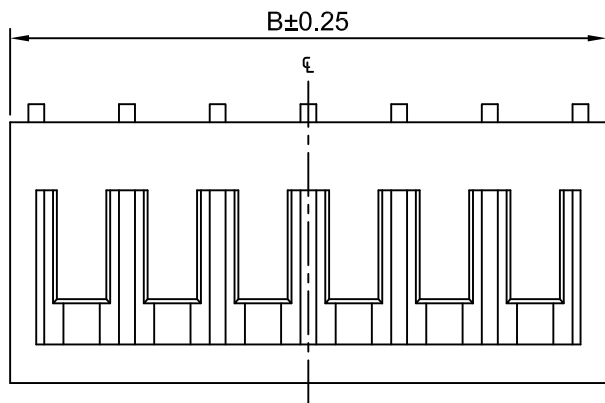

Beijing Hongli Kunpeng International Trade Co., Ltd.

Unit	Scale	Sheet	TITLE
mm	6:1	1 of 1	2.00mm PITCH HOUSING
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO.
General Tolerances			THIRD ANGLE PROJECTION
A2	MODIFY DRAWING	2021.09.14	HLB-11-H-XP 3
A1	ADD THE SIZE	2020.07.23	
A0	NEW RELEASE	2009.05.10	
REV	DESCRIPTION	DATE	REV A2

A2	MODIFY DRAWING	2021.09.14
A1	ADD THE SIZE	2020.07.23
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE

x.x±0.25
 x.xx±0.20
 x.xxx±0.15
 ANGLES ±1°

