



2x2P

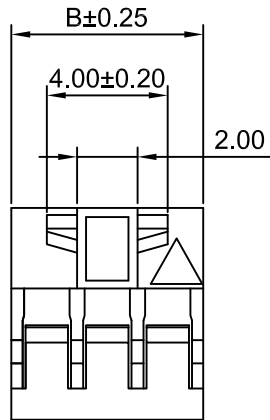

2x3P~2x25P

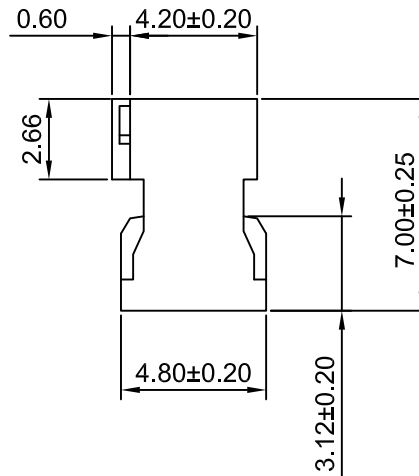

Ordering Information:


A2005HB-N-2xXP-FI - ***
1 2

1.Part No.

2.Material:

(blank) - PBT,UL94V-0

GWT - PBT,UL94V-0,GWT 750°C



SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	4.35	2x13P	24.00	26.35
2x3P	4.00	6.35	2x14P	26.00	28.35
2x4P	6.00	8.35	2x15P	28.00	30.35
2x5P	8.00	10.35	2x16P	30.00	32.35
2x6P	10.00	12.35	2x17P	32.00	34.35
2x7P	12.00	14.35	2x18P	34.00	36.35
2x8P	14.00	16.35	2x19P	36.00	38.35
2x9P	16.00	18.35	2x20P	38.00	40.35
2x10P	18.00	20.35	2x21P	40.00	42.35
2x11P	20.00	22.35	2x22P	42.00	44.35
2x12P	22.00	24.35			

Beijing Hongli Kumpeng International Trade Co., Ltd.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

Title :
2.00mm Pitch
Dual Row Housing

REV	DESCRIPTION	DATE	General Tolerance
A2	CHANGE THE DRAWING	2019.11.01	
A1	ADD THE INFORMATION	2018.12.25	x.x±0.25
A0	NEW RELEASE	2013.02.21	x.xx±0.20
			x.xxx±0.15

PROJECT	
---------	--

DRAW NO :
HLB-05-HB-N-2xXP-FI 109

REV	A2
-----	----