




**Ordering Information:**  
**A2005HC-N-2xXP - \*\* - \*\***  
 1 2 3  
 1.Part NO.  
 2.Halogen:  
 (Blank): Normal Material  
 HF: Halogen Free  
 3.Housing Color:  
 (Blank):Black  
 IV: Ivory


**SPECIFICATIONS:**  
 Current Rating: 2A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Material:Nylon 66,UL94V-0

**Ordering Information & Dimensions**

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2X3P	4.00	6.54	2X15P	28.00	30.54
2X4P	6.00	8.54	2X16P	30.00	32.54
2X5P	8.00	10.54	2X17P	32.00	34.54
2X6P	10.00	12.54	2X18P	34.00	36.54
2X7P	12.00	14.54	2X19P	36.00	38.54
2X8P	14.00	16.54	2X20P	38.00	40.54
2X9P	16.00	18.54	2X21P	40.00	42.54
2X10P	18.00	20.54	2X22P	42.00	44.54
2X11P	20.00	22.54	2X23P	44.00	46.54
2X12P	22.00	24.54	2X24P	46.00	48.54
2X13P	24.00	26.54	2X25P	48.00	50.54
2X14P	26.00	28.54			

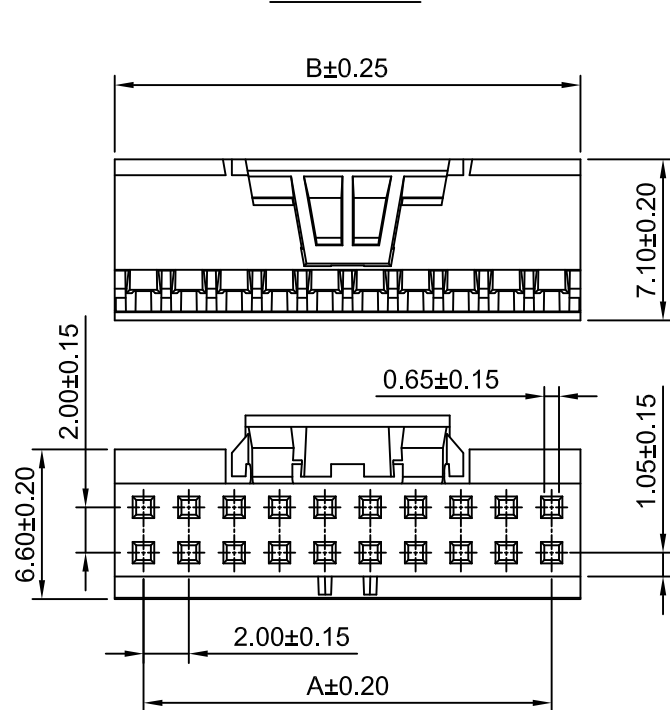

2x3P~2x4P

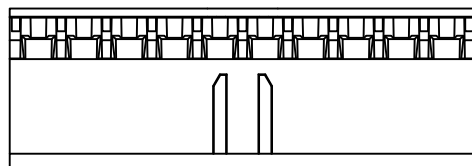

A1	MODIFY DRAWING	2021.05.17
A0	NEW RELEASE	2021.01.28
REV	DESCRIPTION	DATE

Beijing Hongli Kunpeng International Trade Co., Ltd.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	2.00mm PITCH DUAL ROW HOUSING	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			HLB-05-HC-N-2xXP 104	
				REV A1