
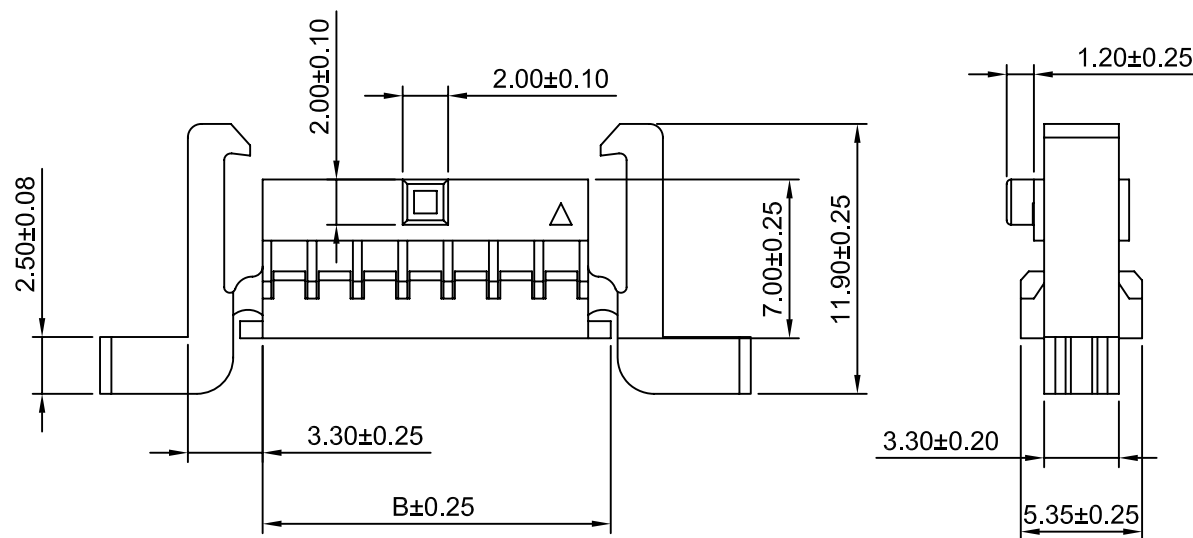


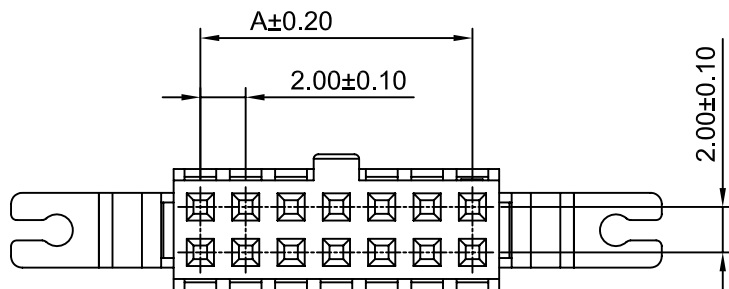

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max.

Insulation Resistance: $1000\text{M}\Omega$ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66, UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x7P	12.00	14.35	2x14P	26.00	28.35
2x8P	14.00	16.35	2x15P	28.00	30.35
2x9P	16.00	18.35	2x16P	30.00	32.35
2x10P	18.00	20.35	2x17P	32.00	34.35
2x11P	20.00	22.35	2x18P	34.00	36.35
2x12P	22.00	24.35	2x19P	36.00	38.35
2x13P	24.00	26.35	2x20P	38.00	40.35

Beijing Hongli Kunpeng International Trade Co.,Ltd.

Unit		Scale		Sheet		Title : 2.00mm PITCH		
mm		3:1		1 of 1				
Draw BY:			Approved :			DUAL ROW HOUSING		
Yinzipeng			GONGYB					
General Tolerance					ANGLE± 			
x.x≤0.25								
x.xx≤0.20								
x.xxx≤0.15								
DRAW NO : HLB-05-HA-2xXP-A 3						REV A0		