
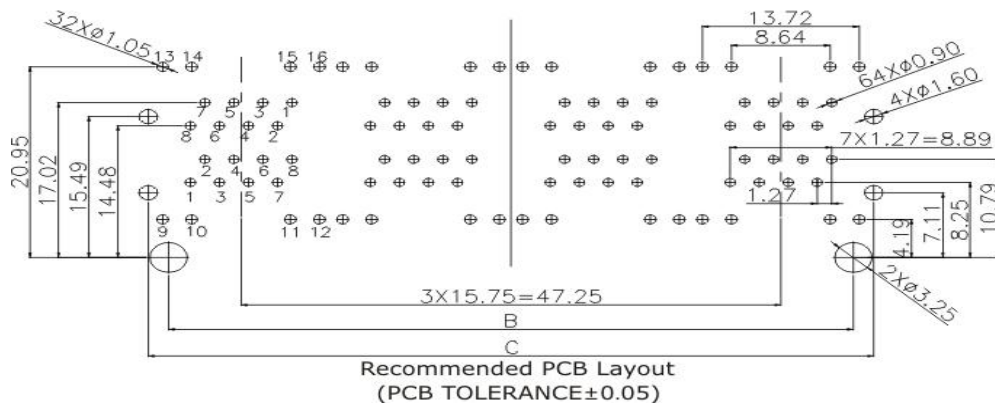


北京鸿利鲲鹏国际贸易有限公司

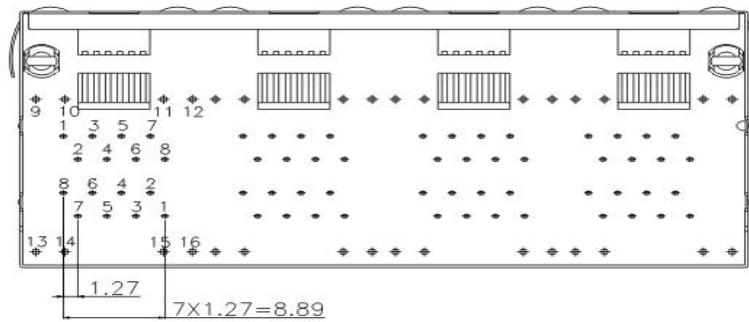

2x4 Port, Shielded, With LED, R/A Type
Current Rating : 1.5 Ampere

Insulation Resistance : 1000 M Min

Dielectric Withstanding : 1000 V

Contact Resistance : 30 m Max

Mating Force : 30N Max

Unmating Force: 50N Min

Durability : 750 Cycles

| SIZE | PORT | 2X1 | 2X2 | 2X3 | 2X4 | 2X5 | 2X6 |
|------|------|-------|-------|-------|-------|-------|-------|
| A | | 16.50 | 32.10 | 48.00 | 63.75 | 79.50 | 95.25 |
| B | | 12.69 | 28.44 | 44.19 | 59.94 | 75.69 | 91.44 |
| C | | 16.25 | 32.00 | 47.75 | 63.50 | 79.25 | 95.00 |