

HLAL Series

DIN41612 C Simple Type Female

Drawing NO. : DIN150



UNIT:mm

MATERIAL:

Contacts:Brass
Housing:PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating:2 A
Dielectric Withstanding Voltage:AC 1000V
Insulator Resistance:1000 MΩ min
Contact Resistance:30 mΩ max
Operating Temperature:-55° C~+105° C

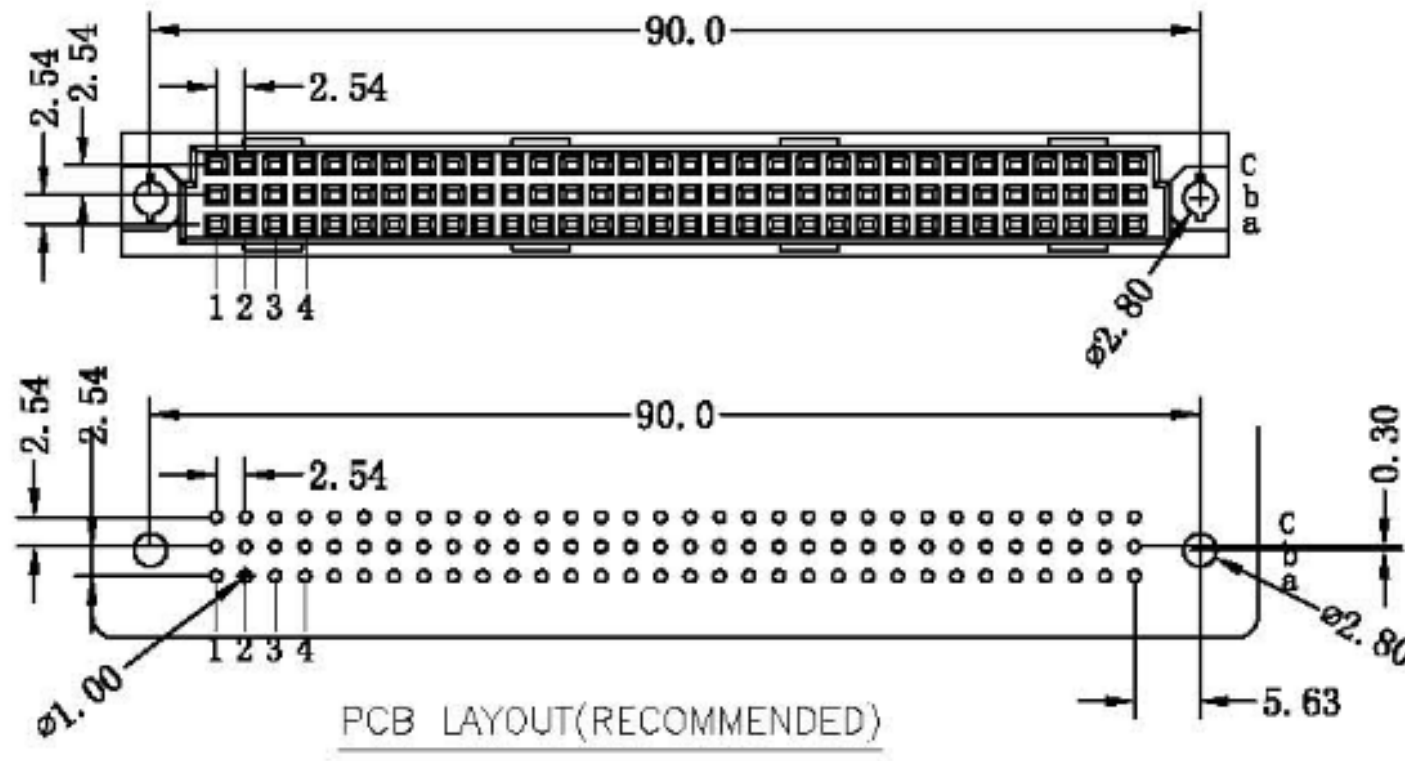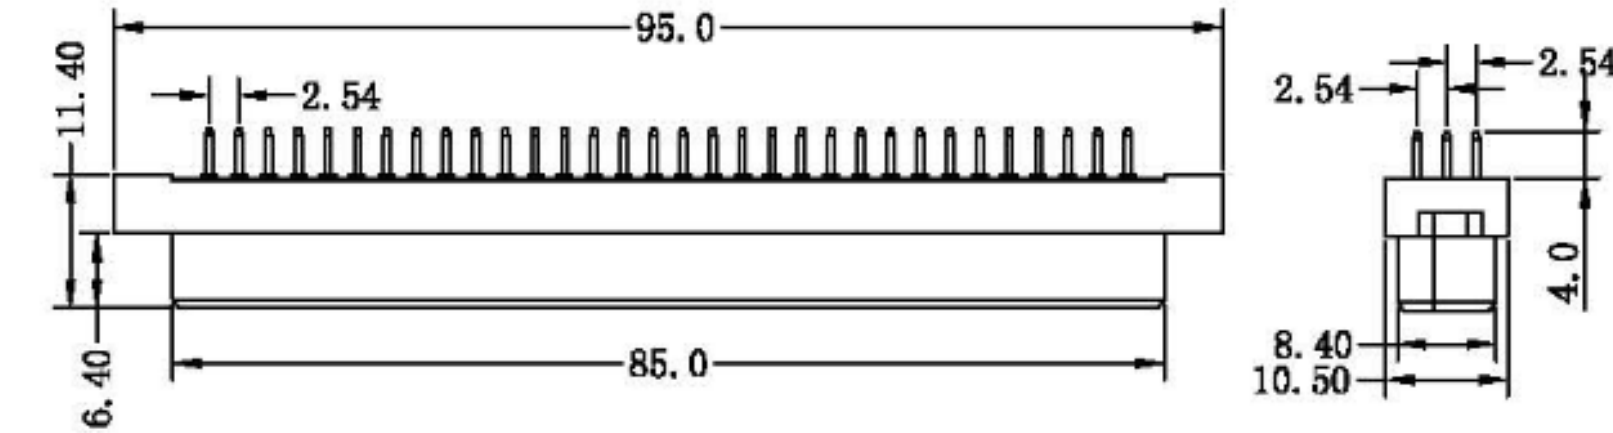

| Pitch | Position | Rows with Contacts | Contact Arrange |
|--------|----------|--------------------|-----------------|
| 2.54mm | 96 | a b c | |
| | 64 | a b - | |
| | 64 | a - c | |
| | 32 | a - - | |
| 5.08mm | 48 | a b c | |
| | 32 | a b - | |
| | 32 | a - c | |
| | 16 | a - - | |

ORDERING INFORMATION

| Series N.O | Pitch(mm) | Contact Type | Position | Contact length(mm) | Contact Plating | Glod Plating | Dip Type |
|--------------------|--------------------|--------------|----------------------------|--------------------|---|---|-------------|
| HLAL- | * | 2 | * | * | * | * | D1 |
| DIN41612 C Type | 1: 2.54 2: 5.08 | 2:Female | 96 64 48 32 16 | 1: 4.0 | C: Dip Tin Contact Gold G: Glod | 00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u" | Simple type |