


# HLAL Series

## DIN41612 C Simple Type Female

Drawing NO. : DIN154

UNIT:mm

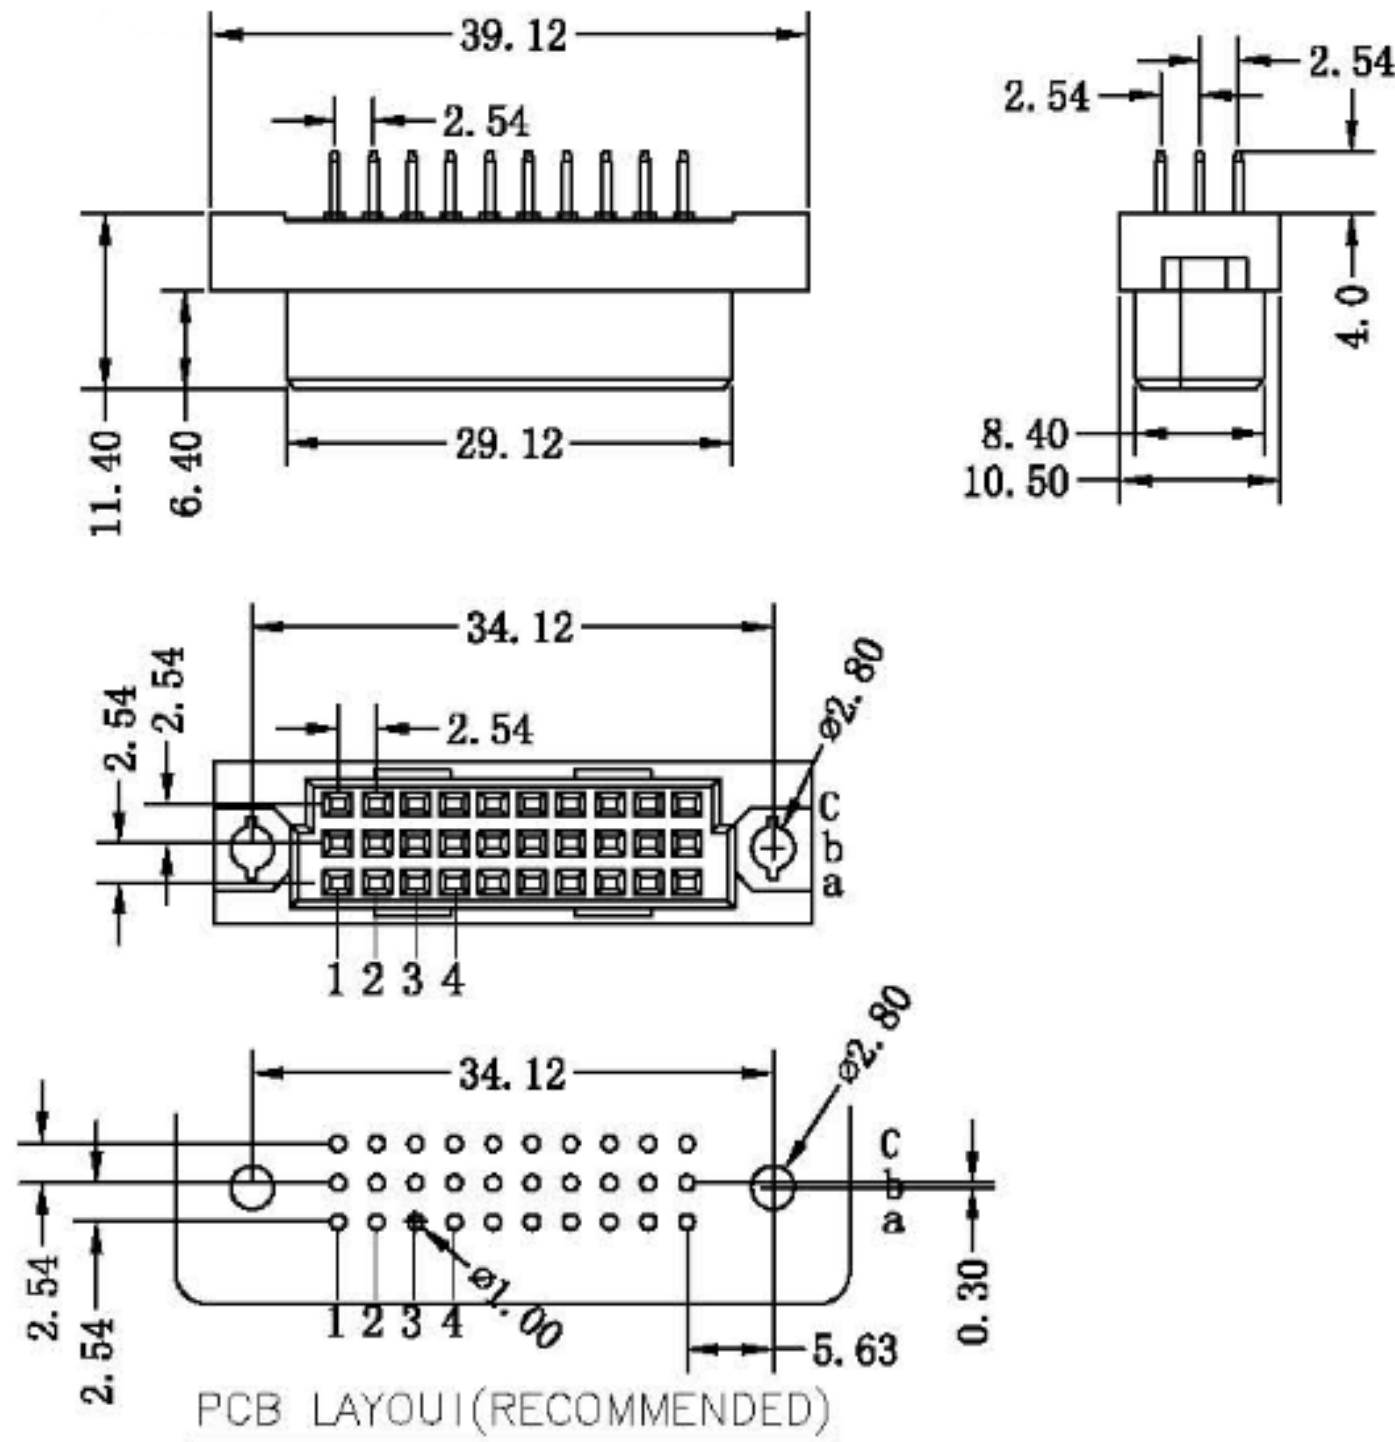

### MATERIAL:

Contacts: Brass  
Housing: PBT UL 94V-0

### ELECTRICAL CHARACTERISTICS:

Current Rating: 2 A  
Dielectric Withstanding Voltage: AC 1000V  
Insulator Resistance: 1000 M $\Omega$  min  
Contact Resistance: 30 m $\Omega$  max  
Operating Temperature: -55 $^{\circ}$  C--+105 $^{\circ}$  C

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	30	a b c	
	20	a b -	
	20	a - c	
	10	a - -	
5.08mm	15	a b c	
	10	a b -	
	10	a - c	
	5	a - -	

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL-	*	2	*	*	*	*	D1
DIN41612 C Type	1: 2.54 2: 5.08	2:Female	30 20 15 10 5	1: 4.0	C: Dip Tin Contact Gold  G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Simple type

Tel: 86-10-57891098 MP :86-13001179378 or 13146881693

Mail: info@hlkpint.com or lucyliu0807 @163.com