


HLAL Series

DIN41612 C Type Female

Drawing NO. : DIN077

UNIT:mm

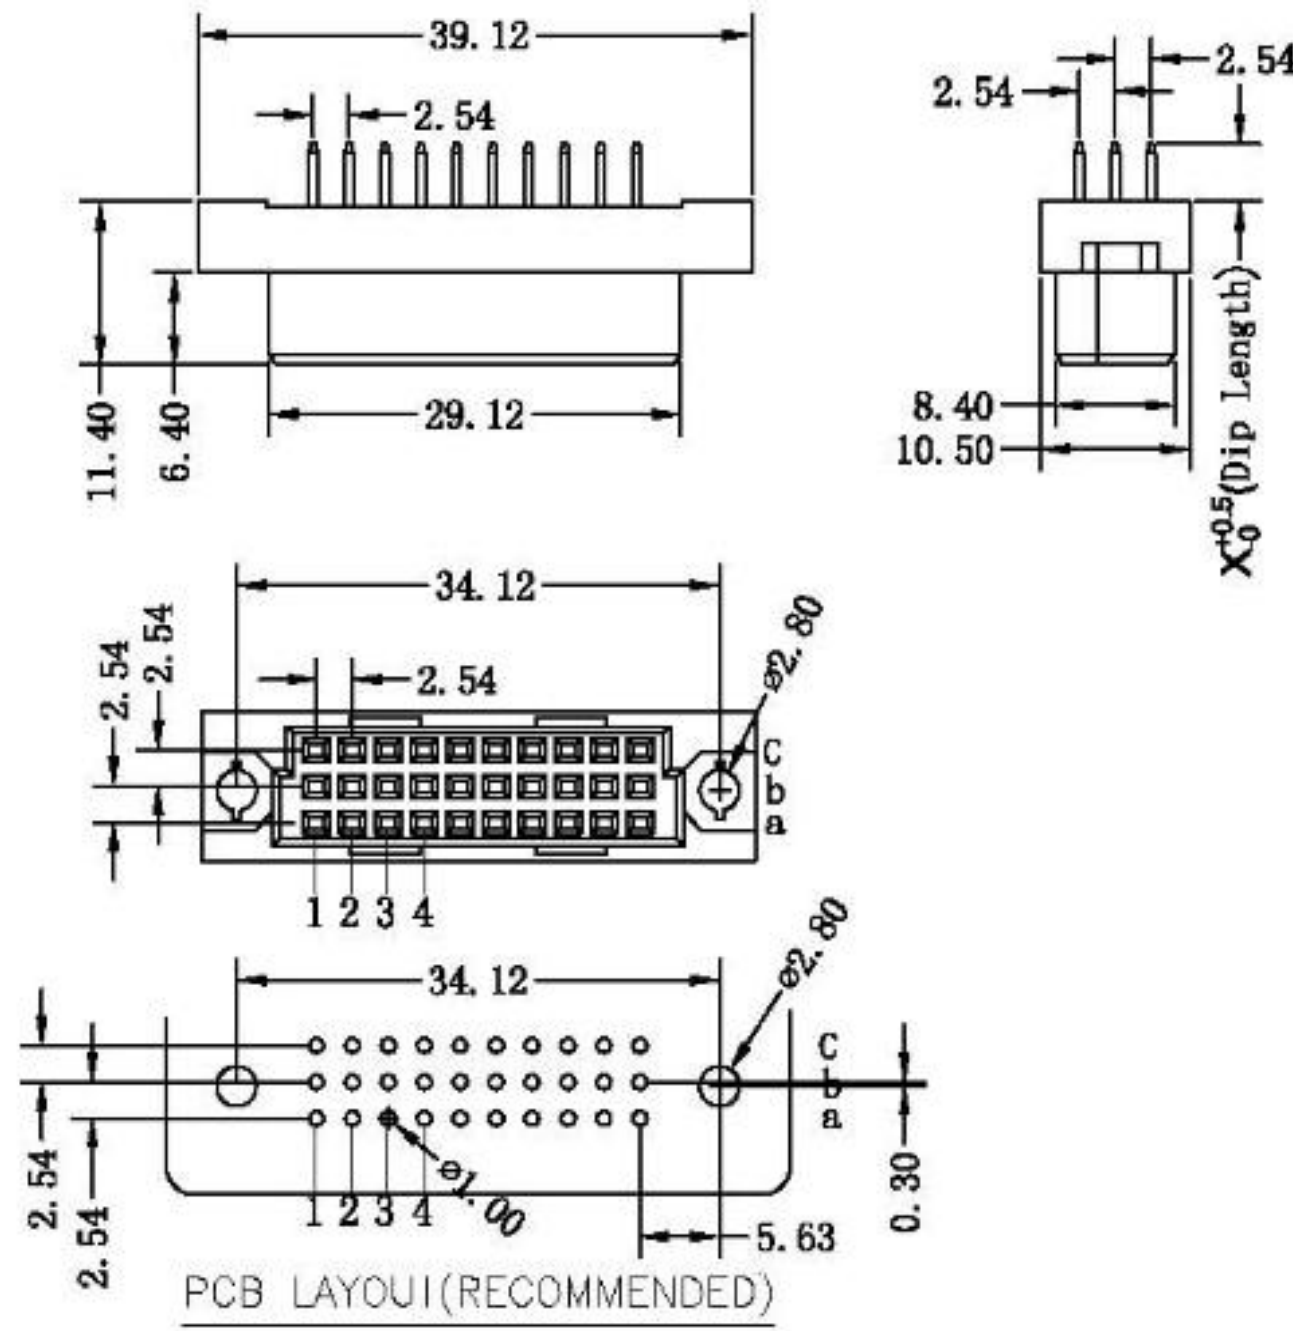

MATERIAL:

Contacts: Brass
Housing: PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating: 2 A
Dielectric Withstanding Voltage: AC 1000V
Insulator Resistance: 1000 M Ω min
Contact Resistance: 30 m Ω max
Operating Temperature: -55 $^{\circ}$ C ~ +105 $^{\circ}$ C

| Pitch | Position | Rows with Contacts | Contact Arrang | Length | | | | |
|--------|----------|--------------------|----------------|--------|------|------|------|------|
| | | | | X | 1 | 2 | 3 | 4 |
| 2.54mm | 30 | a b c | | 4.0 | 13.0 | 15.0 | 17.0 | 25.0 |
| | 20 | a b - | | | | | | |
| | 20 | a - c | | | | | | |
| | 10 | a - - | | | | | | |
| 5.08mm | 15 | a b c | | | | | | |
| | 10 | a b - | | | | | | |
| | 10 | a - c | | | | | | |
| | 5 | a - - | | | | | | |

ORDERING INFORMATION

| Series N.O | Pitch(mm) | Contact Type | Position | Contact length(mm) | Contact Plating | Glod Plating | Dip Type |
|--------------------|--------------------|--------------|---------------------------|--|---|--|------------|
| HLAL - | * | 2 | * | * | * | * | D |
| DIN41612 C Type | 1: 2.54 2: 5.08 | 2:Female | 30 20 15 10 5 | 1: 4.0 2: 13.0 3: 15.0 4: 17.0 5: 25.0 | C: Dip Tin Contact Gold G: Glod | 00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15: 15u" 30: 30u" | Blank: Dip |

Tel: 86-10-57891098 MP :86-13001179378 or 13146881693

Mail: info@hlpint. com or lucyliu0807 @163.com