


REV	DATE	DESCRIPTION

MATERIAL:  
Housing: PBT UL 94V-0  
Contacts: Brass  
ELECTRICAL:  
Current rating: 3A  
Contact resistance: 30mΩ max  
Insulator resistance: 1000 MΩ min  
Dielectric withstanding voltage: 1000V AC  
Operating temperature: -40° C to +105° C

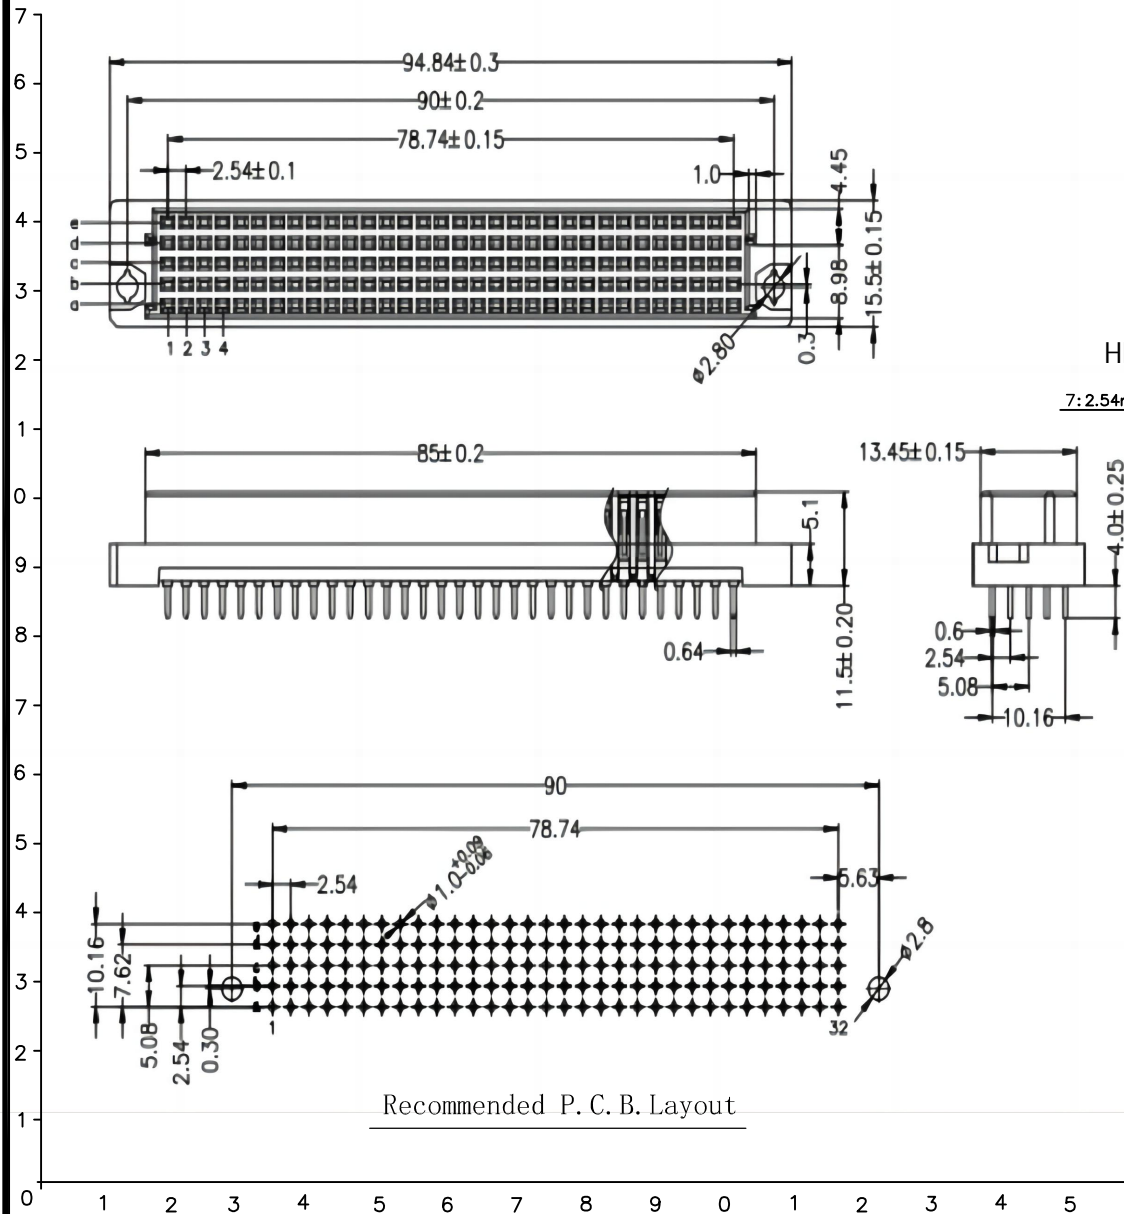

HLAL- 7 2 160 1 \* \* D  
7: 2.54mm 8: 5.08mm  
2: Female  
Position: 160  
Dip Length: (mm)  
1: 4.0  
Blank: DIP  
00: G/F 02: 2u" 03: 3u"  
05: 5u" 10: 10u" 15: 15u" 30: 30u"  
C: Dip Tin Contact Gold  
G: Gold

UNIT : mm

Beijing Hongli Kunpeng International Trade Co., LTD	MODEL NAME:	SELECT	1	2	3	EXTRA	PART NO. HLAL-721601**D		
	European socket C type 160S straight female	DIM	0.000	0.05	0.05	0.10		APPROVED BY:	FILE NO. DIN170-46
			0.00	0.10	0.15	0.20	✓	CHECKED BY:	SCALE:
			0.	0.15	0.25	0.30	✓	DRAW BY: jenny	DATE : 2012-3-28
			0.	0.25	0.30	0.40	✓		
	ANGLE	1.0°	3.0°	5.0°	✓				