


HLAL Series

DIN41612 R Type Male

Drawing NO. : DIN081

UNIT:mm

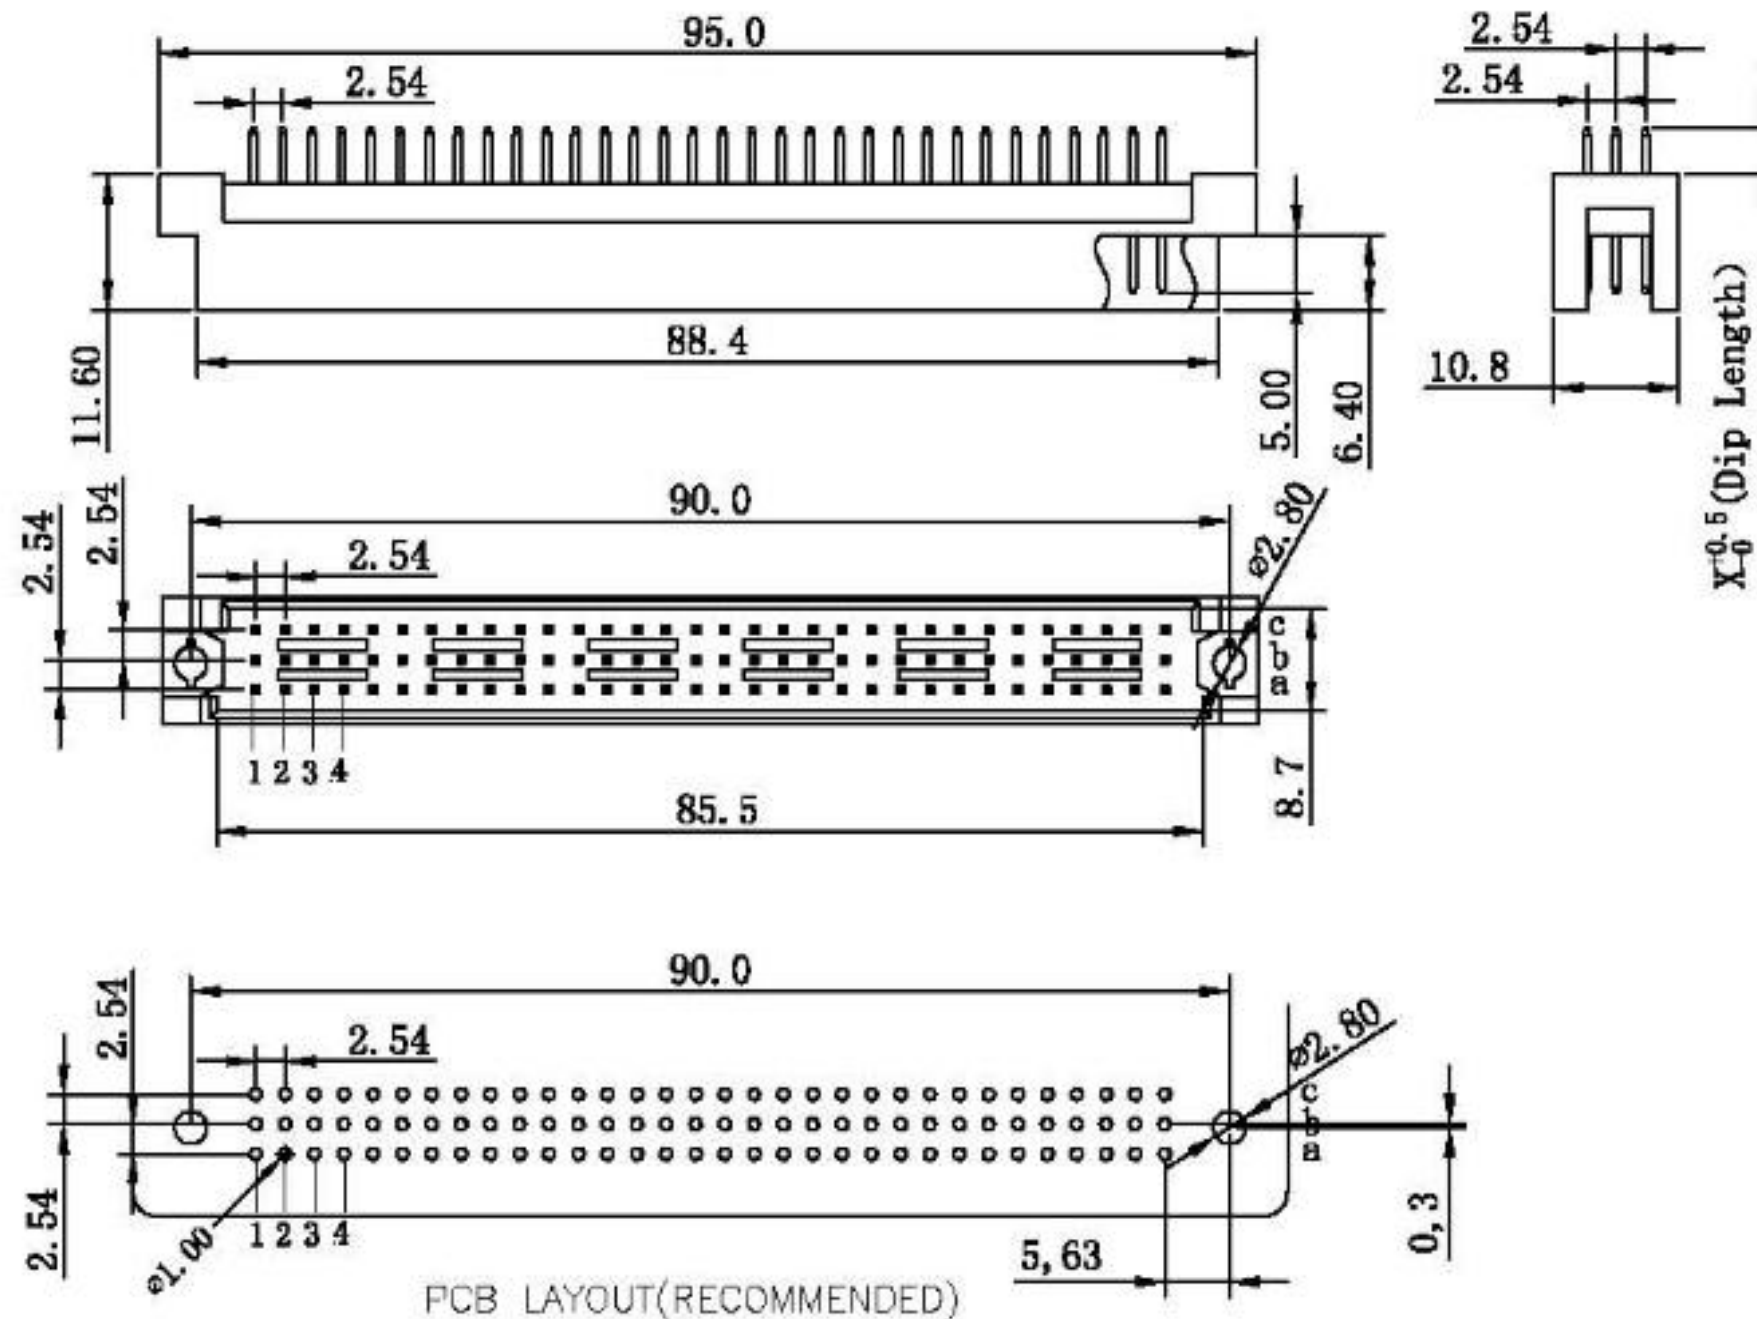

MATERIAL:

Contacts: Brass
Housing: PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating: 2 A
Dielectric Withstanding Voltage: AC 1000V
Insulator Resistance: 1000 MΩ min
Contact Resistance: 30 mΩ max
Operating Temperature: -55° C ~ +105° C

Pitch	Position	Length	1	2	3	4
			4.0	13.0	15.0	17.0
2.54mm	96		a b c			
	64		a b -			
	64		a - c			
	32		a - -			
5.08mm	48		a b c			
	32		a b -			
	32		a - c			
	16		a - -			

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL -	*	3	*	*	*	*	D
DIN41612 R Type	1: 2.54 2: 5.08	3:Male	96 64 48 32 16	1: 4.0 2:13.0 3:15.0 4:17.0	C: Dip Tin Comtact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Blank: Dip

Tel: 86-10-57891098 MP :86-13001179378 or 13146881693

Mail: info@hlpint. com or lucyliu0807 @163.com