
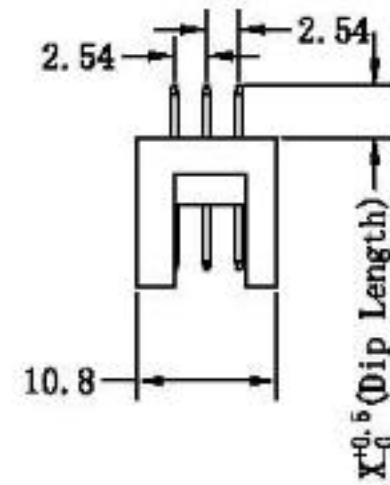


# HLAL Series

## DIN41612 R Type Male

Drawing NO. : DIN082

UNIT:mm

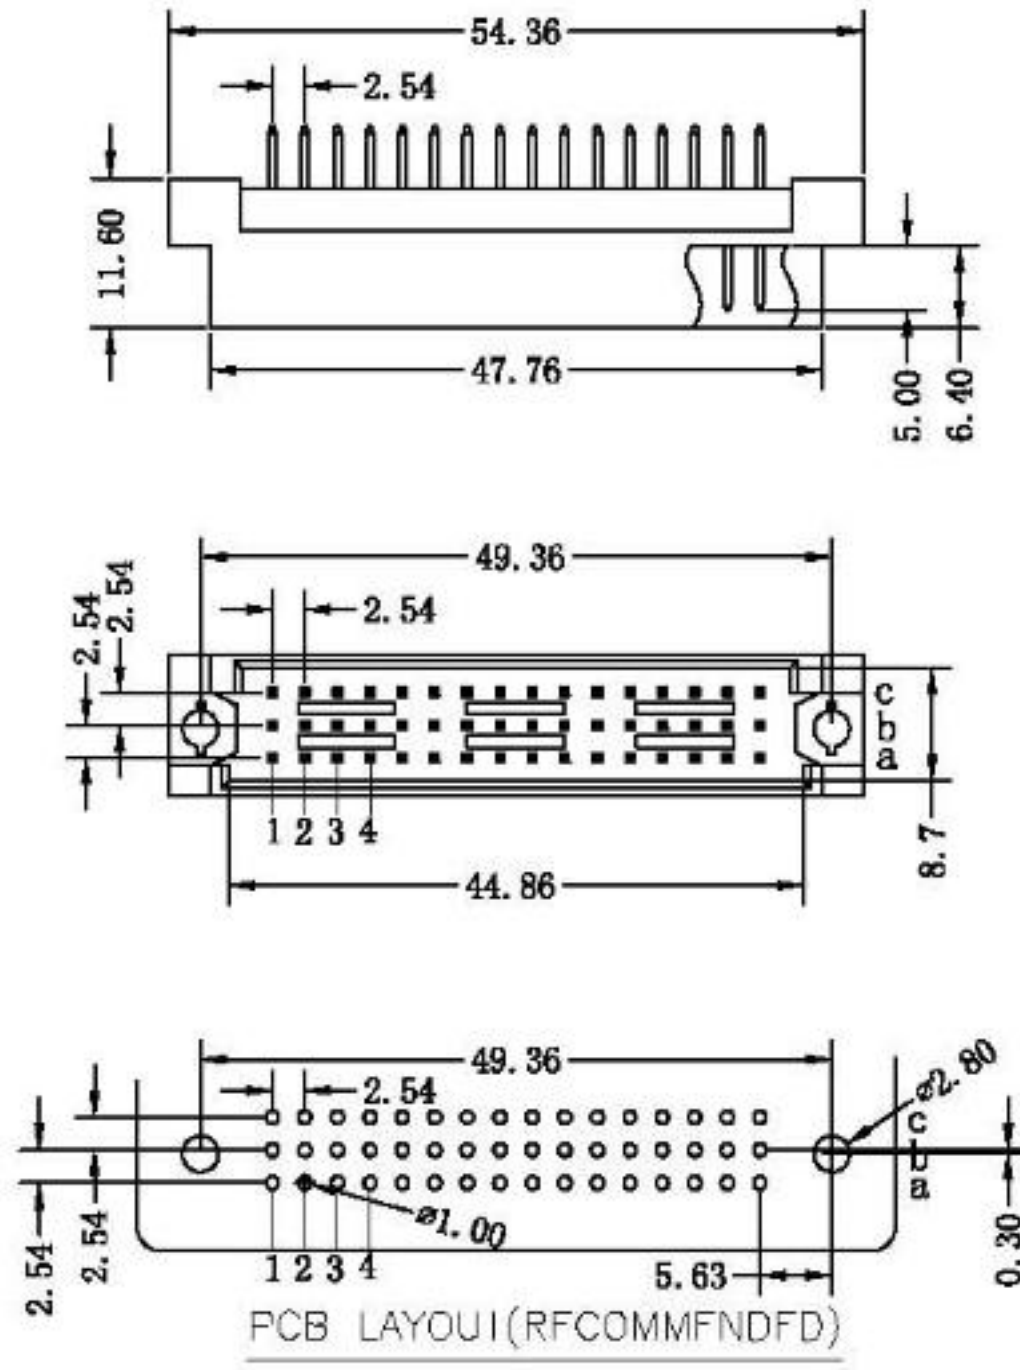

**MATERIAL:**

Contacts:Brass  
Housing:PBT UL 94V-0

**ELECTRICAL CHARACTERISTICS:**

Current Rating:2 A  
Dielectric Withstanding Voltage:AC 1000V  
Insulator Resistance:1000 MΩ min  
Contact Resistance:30 mΩ max  
Operating Temperature:-55° C~+105° C

Pitch	Position	Rows with Contacts	Length			
			4.0	13.0	15.0	17.0
2.54mm	48	a b c	[Diagram]			
	32	a b -	[Diagram]			
	32	a - c	[Diagram]			
	16	a - -	[Diagram]			
5.08mm	24	a b c	[Diagram]			
	16	a b -	[Diagram]			
	16	a - c	[Diagram]			
	8	a - -	[Diagram]			

**ORDERING INFORMATION**

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL -	*	3	*	*	*	*	D
DIN41612 R Type	1: 2.54 2: 5.08	3:Male	48 32 24 16 8	1: 4.0 2: 13.0 3: 15.0 4: 17.0	C: Dip Tin Contact Gold  G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Blank: Dip

Tel: 86-10-57891098 MP :86-13001179378 or 13146881693

Mail: info@hlpint. com or lucyliu0807 @163.com