


HLAL Series

DIN41612 Q Type Male

Drawing NO. : DIN093

UNIT:mm

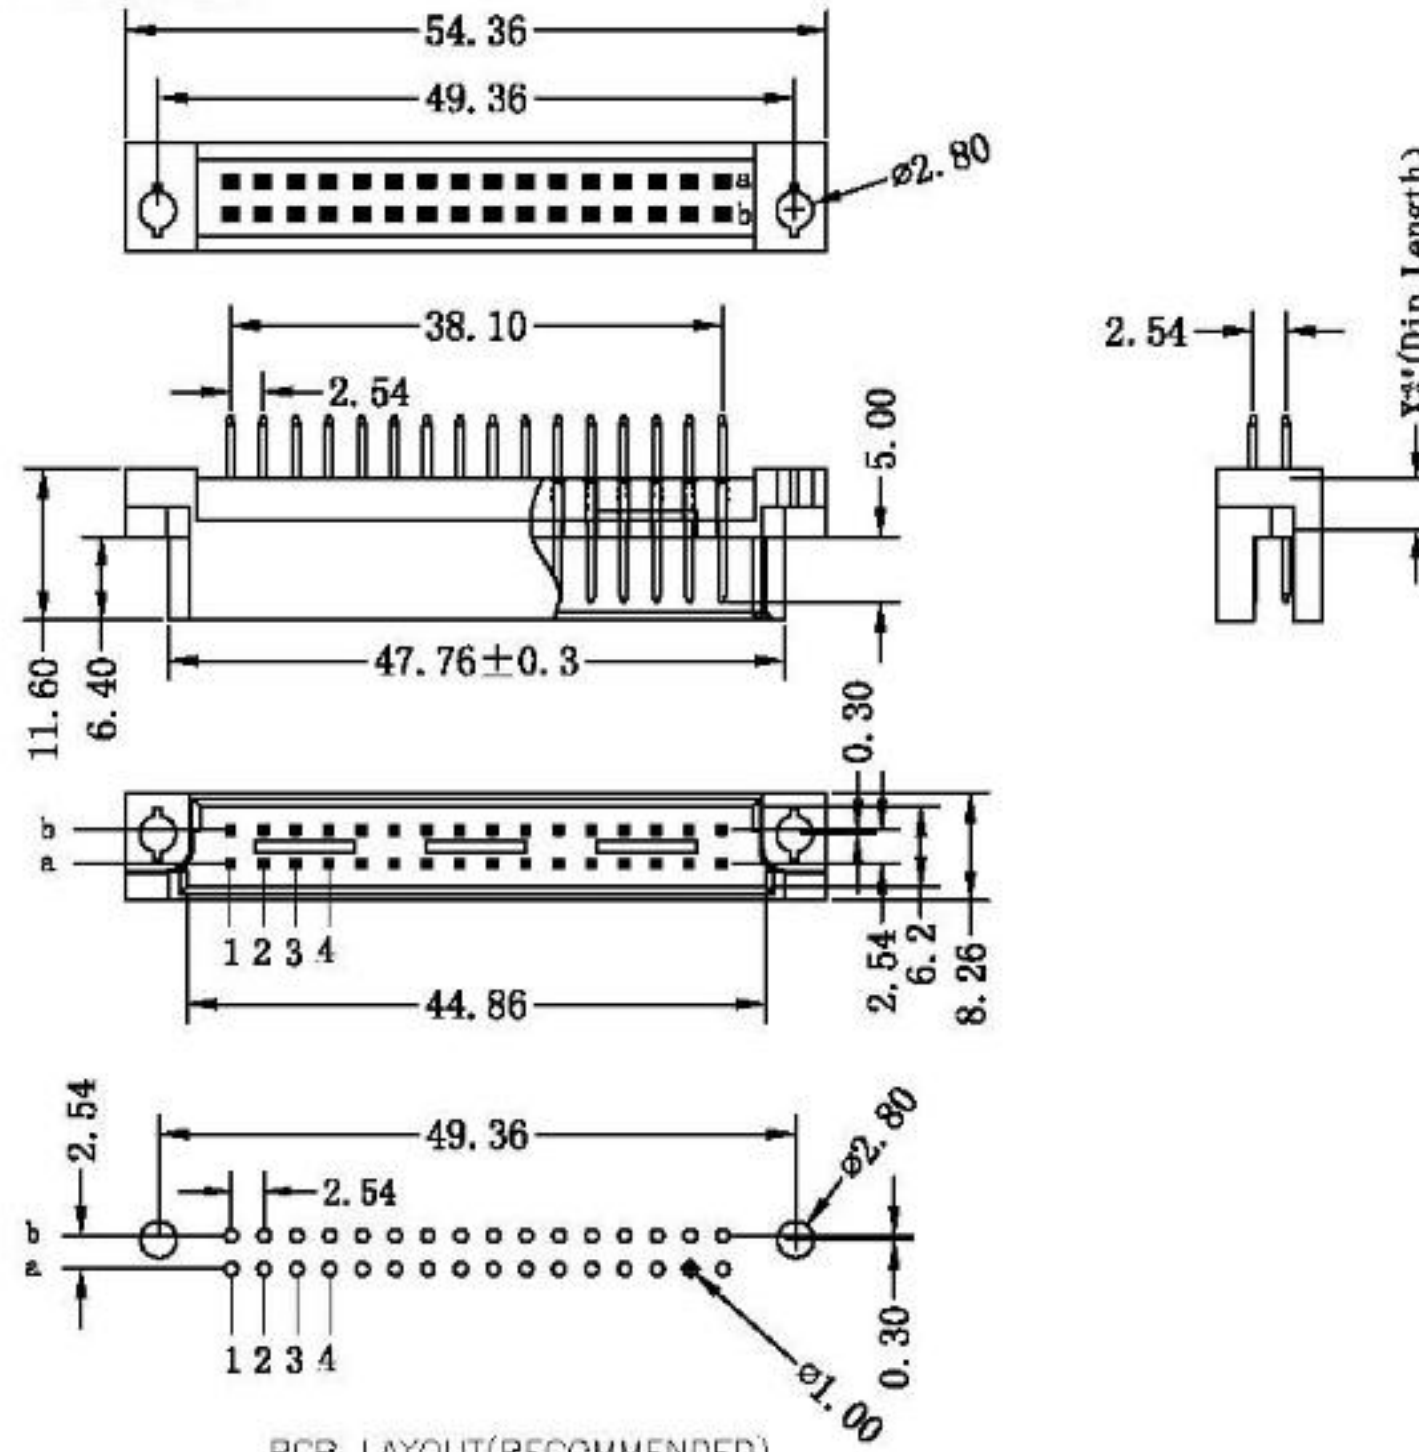

MATERIAL:

Contacts:Brass
Housing:PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating:2 A
Dielectric Withstanding Voltage:AC 1000V
Insulator Resistance:1000 MΩ min
Contact Resistance:30 mΩ max
Operating Temperature:-55° C~+105° C

Pitch	Position	Length	1	2	3	4
			4.0	13.0	15.0	17.0
2.54mm	32		a	b		
	16		a	-		
5.08mm	16		a	b		
	8		a	-		

PCB LAYOUT(RECOMMENDED)

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL-	*	3	*	*	*	*	D
DIN41612 Q Type	3: 2.54 4: 5.08	3:Male	32 16 8	1: 4.0 2:13.0 3:15.0 4:17.0	C: Dip Tin Contact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Blank: Dip

Tel: 86-10-57891098 MP :86-13001179378 or 13146881693

Mail: info@hlpint. com or lucyliu0807 @163.com