

HLAL Series

DIN41612 B Type Male

Drawing NO. : DIN131


UNIT:mm

MATERIAL:

Contacts:Brass
Housing:PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating:2 A
Dielectric Withstanding Voltage:AC 1000V
Insulator Resistance:1000 MΩ min
Contact Resistance:30 mΩ max
Operating Temperature:-55° C~+105° C

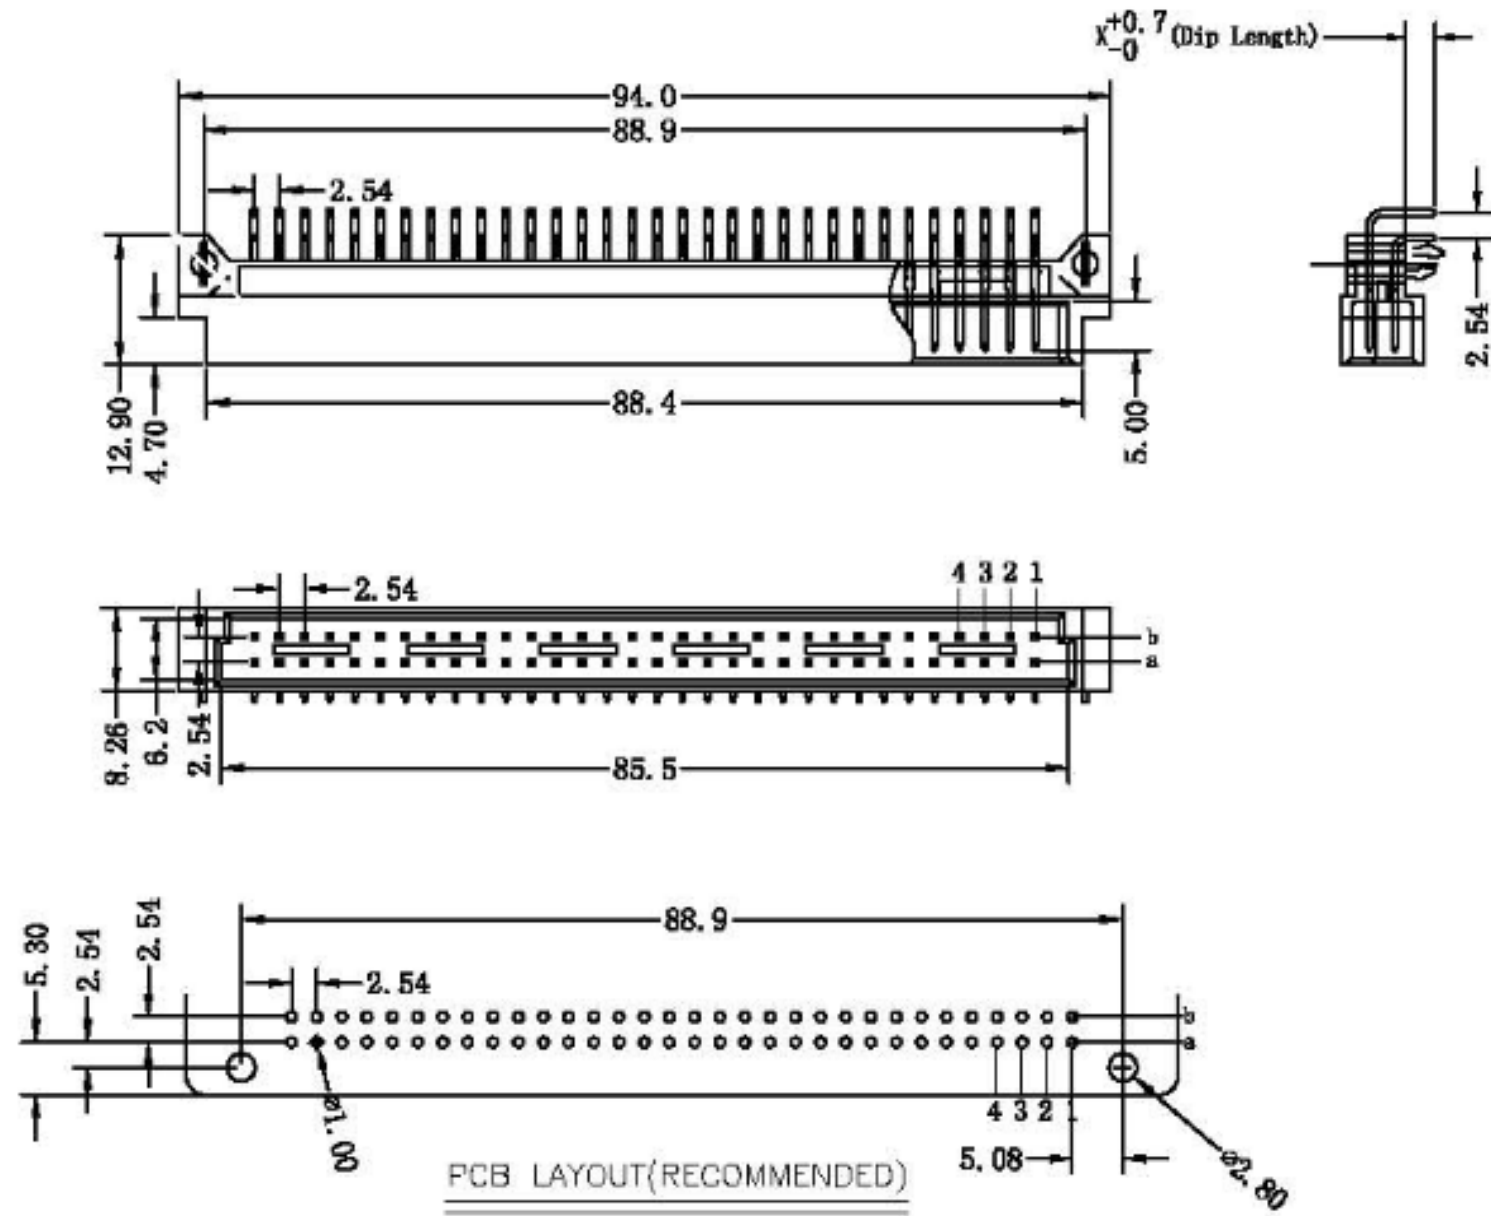

Pitch	Position	Rows with Contacts	Contact Arrange	Length	
				1	2
2.54mm	64	a b		3.0	4.0
	32	a -		3.0	4.0
5.08mm	32	a b		3.0	4.0
	16	a -		3.0	4.0

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type	With Lock
HLAL-	*	1	*	*	*	*	D	L1
DIN41612 B Type	3: 2.54 4: 5.08	1:Male	64 32 16	1: 3.0 2: 4.0	C: Dip Tin Contact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Blank: Dip	L1:With Lock

Tel: 86-10-57891098 MP :86-13001179378 or 13146881693

Mail: info@hlpint. com or lucyliu0807 @163.com