
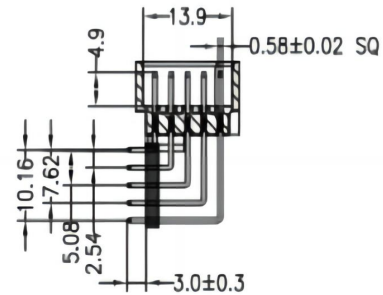
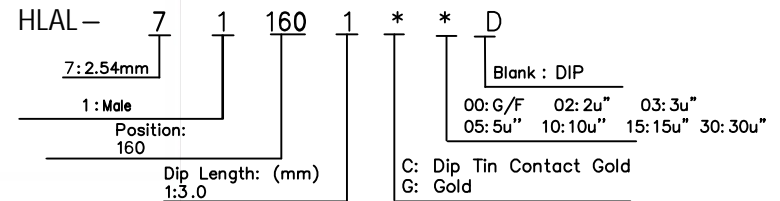
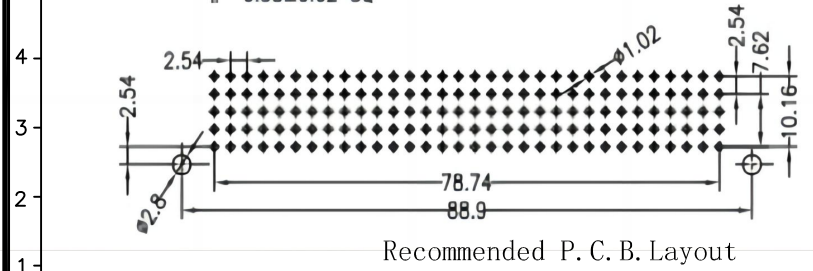
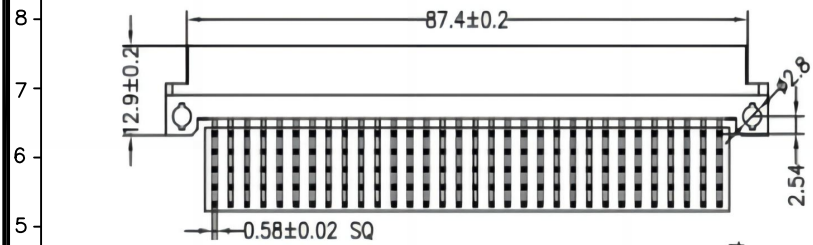
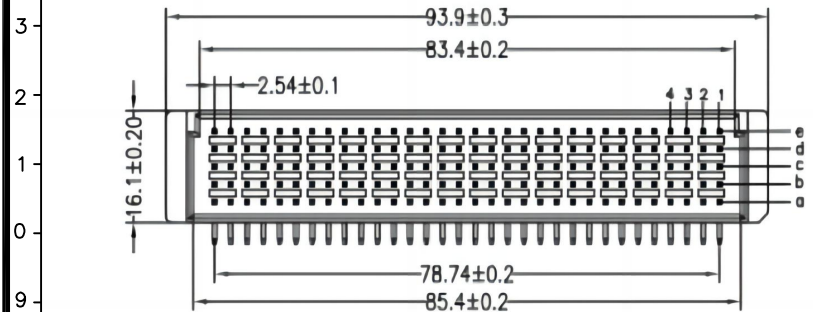


REV	DATE	DESCRIPTION

MATERIAL:
Housing: PBT UL 94V-0
Contacts: Brass
ELECTRICAL:
Current rating: 3A
Contact resistance: 30mΩ max
Insulator resistance: 1000 MΩ min
Dielectric withstanding voltage: 1000V AC
Operating temperature: -40° C to +105° C

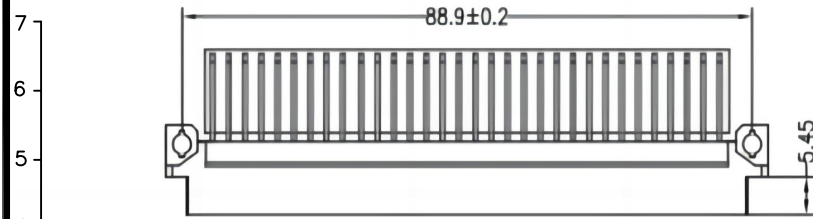

UNIT : mm

Beijing Hongli Kunpeng
International Trade Co., LTD

MODEL NAME:
European socket type C
160P bend male

SELECT	1	2	3	EXTRA
0.000	0.05	0.05	0.10	
0.00	0.10	0.15	0.20	✓
0.0	0.15	0.25	0.30	✓
0.	0.25	0.30	0.40	✓
ANGLE	1.0°	3.0°	5.0°	✓

PART NO. HLAL-711601**D	
APPROVED BY:	FILE NO. DIN181-46
CHECKED BY:	SCALE:
DRAW BY: jenny	DATE : 2012-3-28