
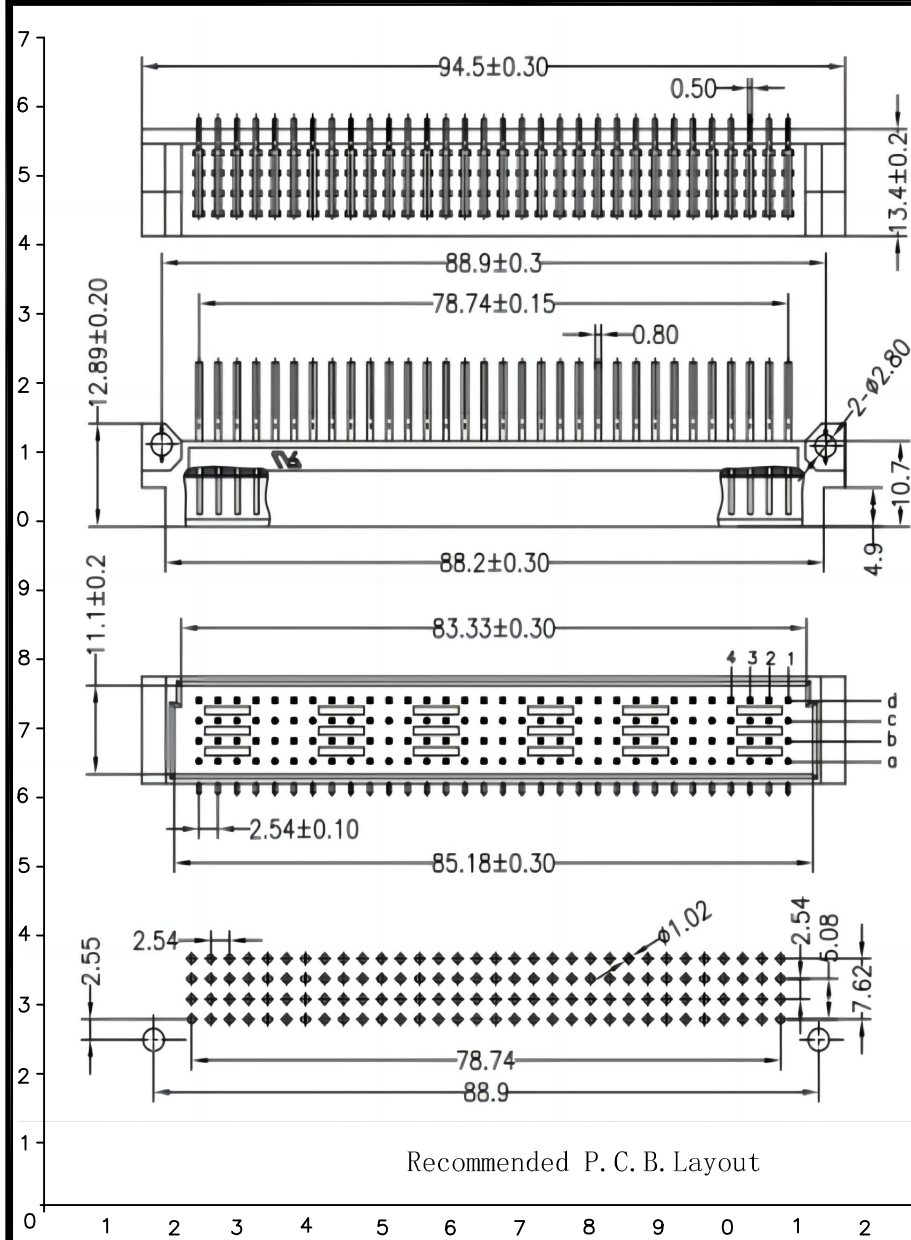
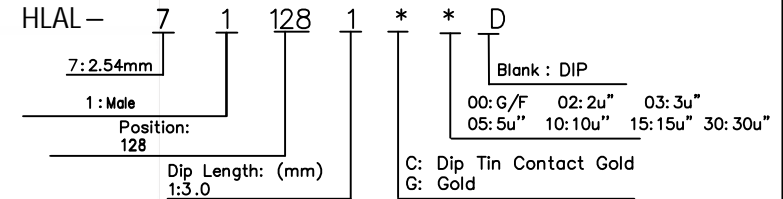


REV	DATE	DESCRIPTION

MATERIAL:
Housing: PBT UL 94V-0
Contacts: Brass
ELECTRICAL:
Current rating: 3A
Contact resistance: 30mΩ max
Insulator resistance: 1000 MΩ min
Dielectric withstanding voltage: 1000V AC
Operating temperature: -40° C to +105° C



Recommended P. C. B. Layout

UNIT : mm

Beijing Hongli Kunpeng International Trade Co., LTD	MODEL NAME:	European socket type C 128P bend male	SELECT	1	2	3	EXTRA	PART NO. HLAL-711281**D		
			DIM	0.000	0.05	0.05	0.10		APPROVED BY:	FILE NO. DIN182-46
				0.00	0.10	0.15	0.20	✓	CHECKED BY:	SCALE:
				0.	0.15	0.25	0.30	✓	DRAW BY: jenny	DATE : 2012-3-28
			ANGLE	1.0°	3.0°	5.0°	✓			