


HLAL Series

DIN41612 C Type Male

Drawing NO. : DIN079

UNIT:mm

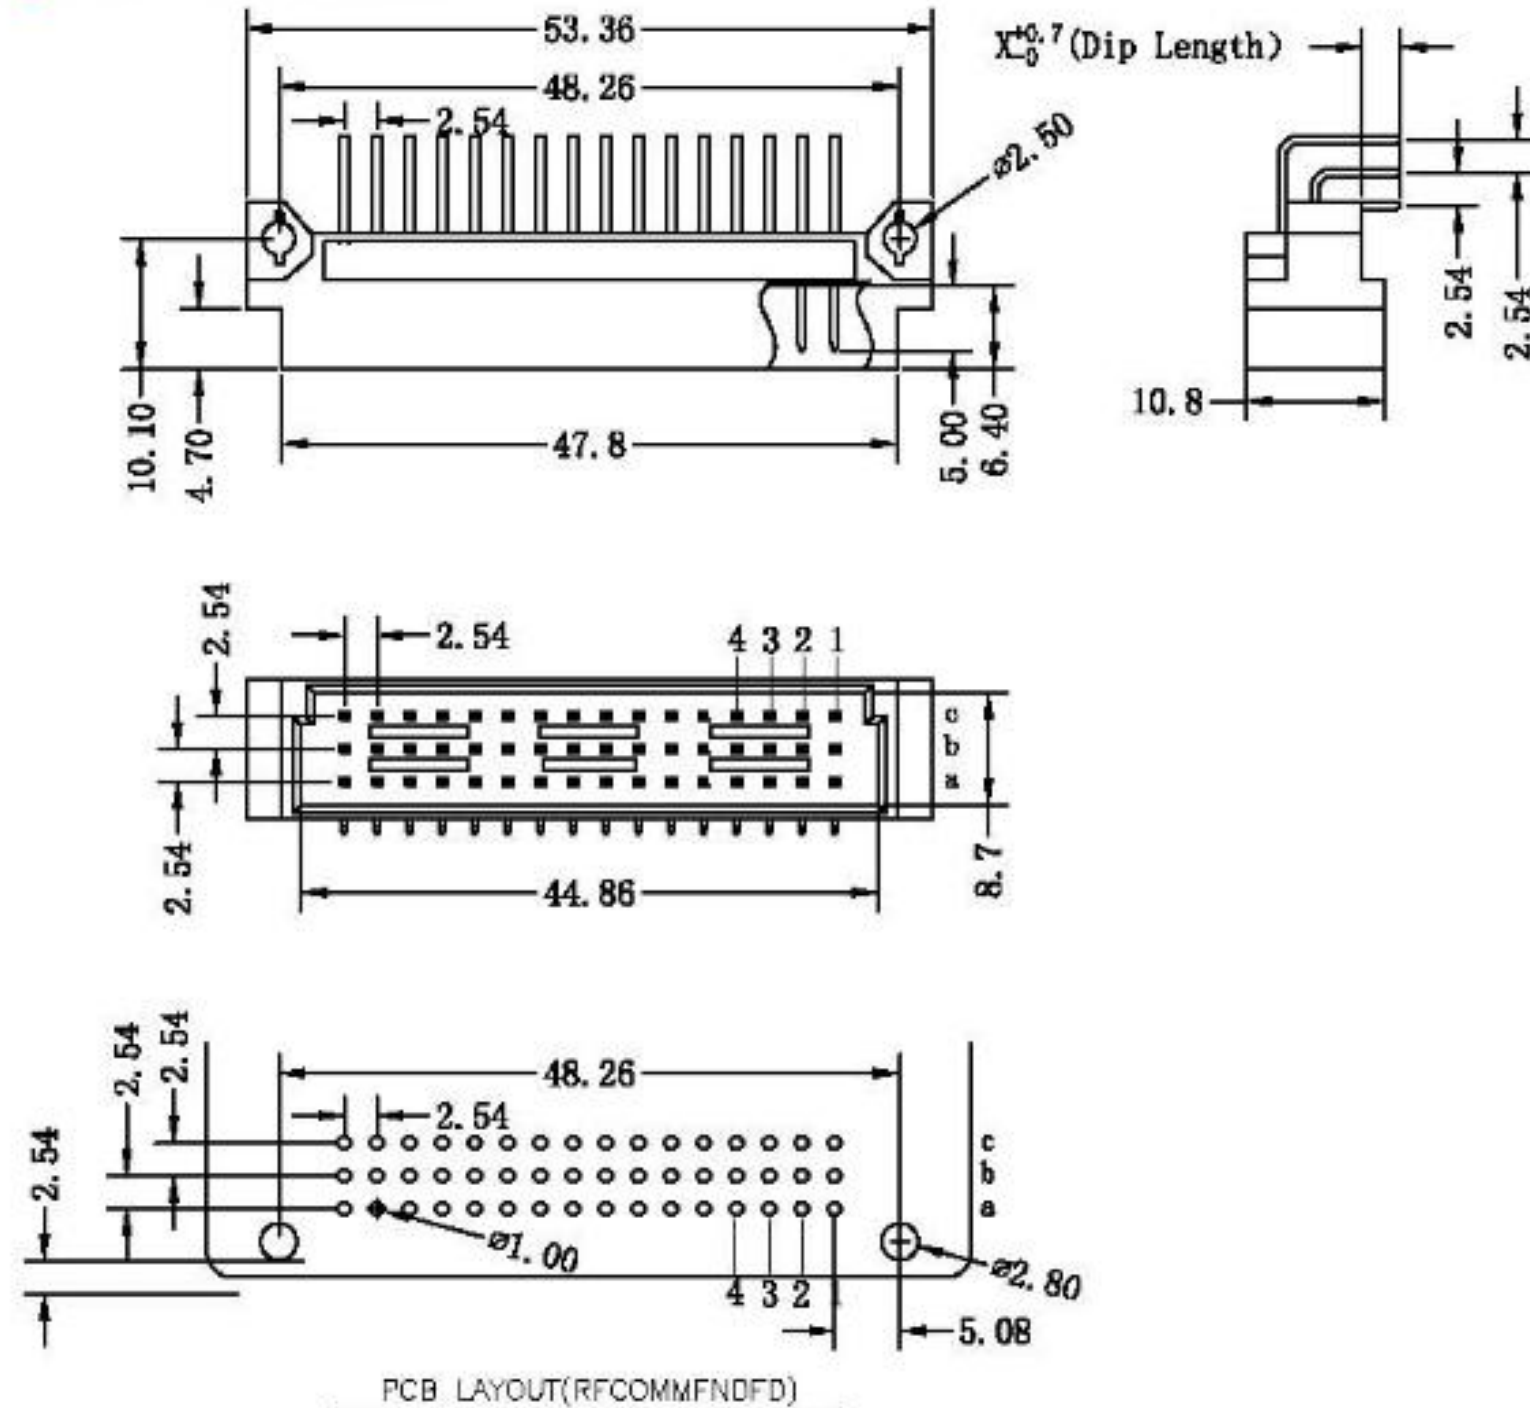

MATERIAL:

Contacts:Brass
Housing:PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating:2 A
Dielectric Withstanding Voltage:AC 1000V
Insulator Resistance:1000 MΩ min
Contact Resistance:30 mΩ max
Operating Temperature:-55° C--+105° C

Pitch	Position	Rows with Contacts	Length	
			3.0	4.0
2.54mm	48	a b c		
	32	a b -		
	32	a - c		
	16	a - -		
5.08mm	24	a b c		
	16	a b -		
	16	a - c		
	8	a - -		

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL -	*	1	*	*	*	*	D
DIN41612 C Type	1: 2.54 2: 5.08	1:Male	48 32 24 16 8	1: 3.0 2: 4.0	C: Dip Tin Comtact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Blank: Dip

Tel: 86-10- 57891098 MP :86-13001179378 or 13146881693

Mail: info@hlkpint. com or lucyliu0807 @163.com