


REV	DATE	DESCRIPTION

MATERIAL:
Housing: PBT UL 94V-0
Contacts: Brass
ELECTRICAL:
Current rating: 3A
Contact resistance: 30mΩ max
Insulator resistance: 1000 MΩ min
Dielectric withstanding voltage: 1000V AC
Operating temperature: -40° C to +105° C

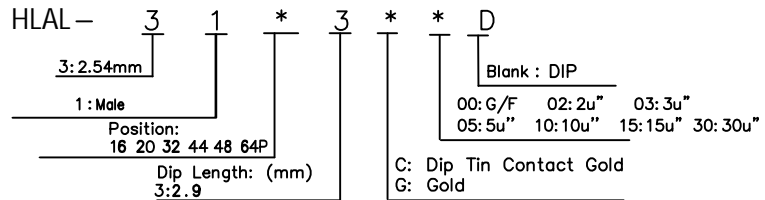

UNIT : mm

Beijing Hongli Kunpeng
International Trade Co., LTD

MODEL NAME:
DIN41612 B Type 2 row
bending male

SELECT	1	2	3	EXTRA
DIM	0.00	0.05	0.05	0.10
TOL	0.00	0.10	0.15	0.20
ANGLE	1.0°	3.0°	5.0°	

PART NO. HLAL-31*3**D	
APPROVED BY:	FILE NO. DIN176-46
CHECKED BY:	SCALE:
DRAW BY: jenny	DATE : 2022-6-6