


HLAL Series

DIN41612 B Type Male

Drawing NO. : DIN090

UNIT:mm

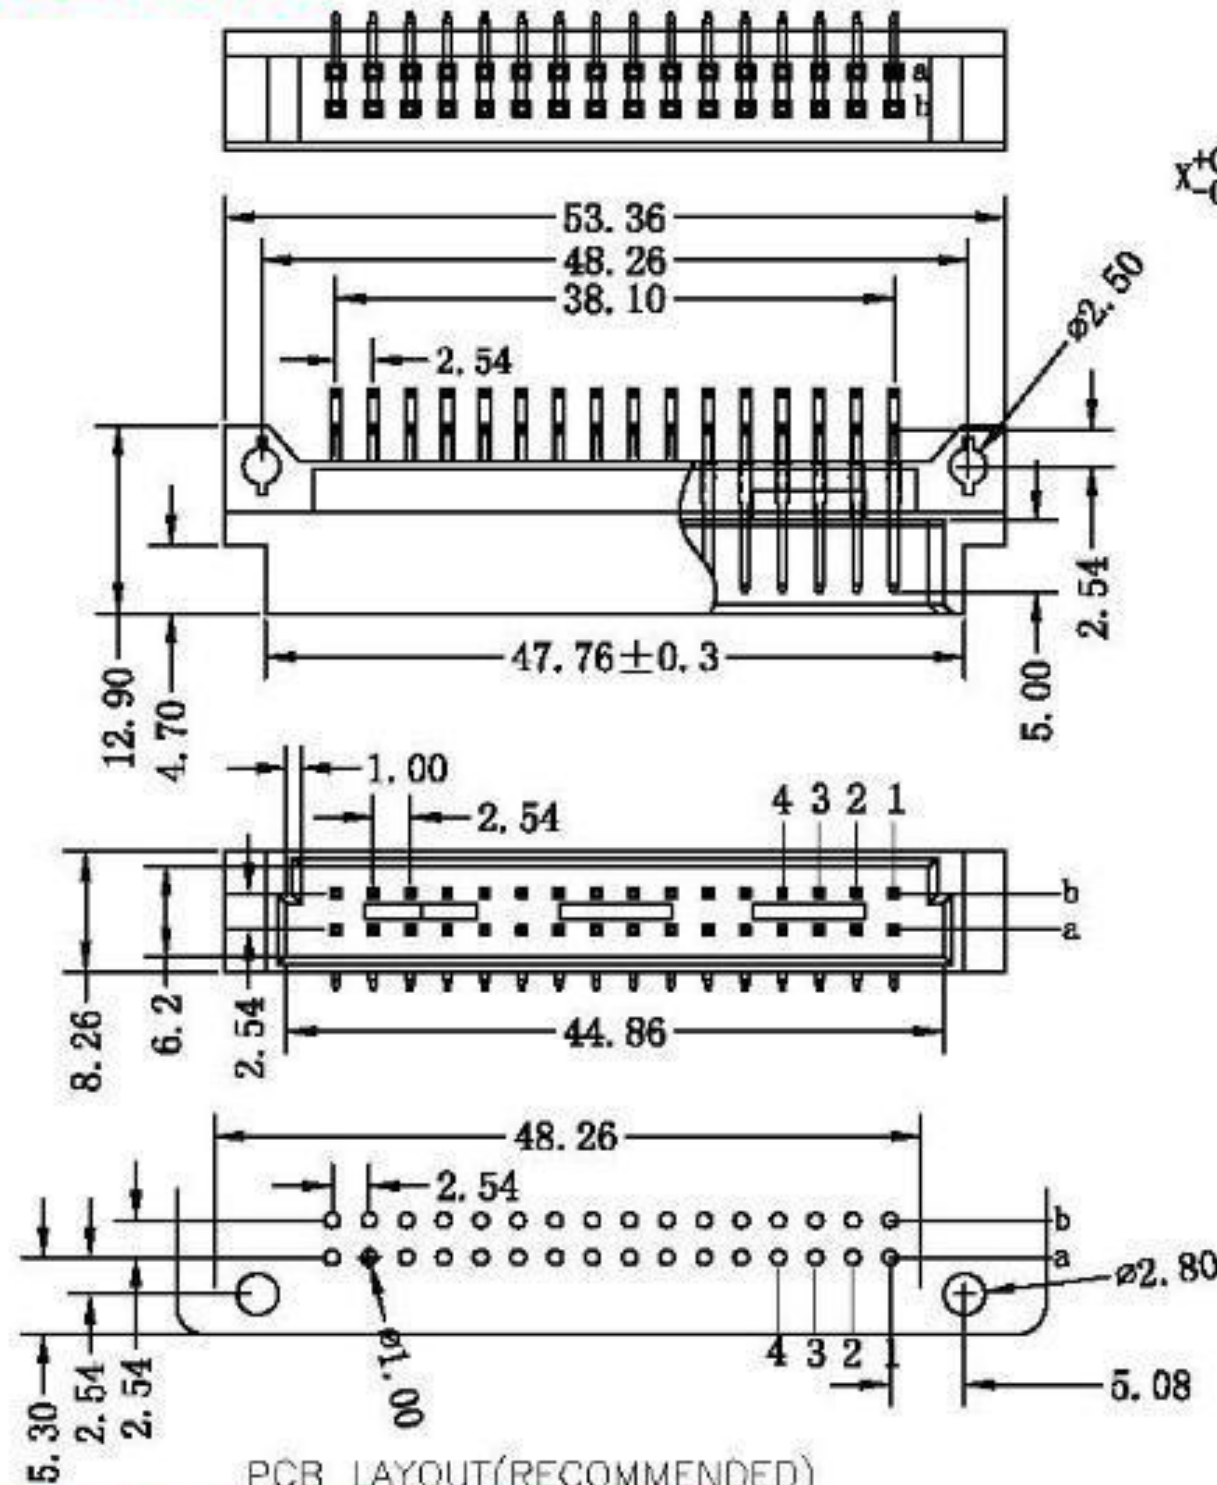

PCB LAYOUT(RECOMMENDED)

MATERIAL:

Contacts: Brass
Housing: PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating: 2 A
Dielectric Withstanding Voltage: AC 1000V
Insulator Resistance: 1000 MΩ min
Contact Resistance: 30 mΩ max
Operating Temperature: -55° C ~ +105° C

Pitch	Position	Rows with Contacts	Length	
			3.0	4.0
2.54mm	32	a b		
	16	a -		
5.08mm	16	a b		
	8	a -		

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL.	*	1	*	*	*	*	D
DIN41612 B Type	3: 2.54 4: 5.08	1:Male	32 16 8	1: 3.0 2: 4.0	C: Dip Tin Contact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15: 15u" 30: 30u"	Blank: Dip

Tel: 86-10- 57891098 MP :86-13001179378 or 13146881693

Mail: info@hlpint. com or lucyliu0807 @163.com