
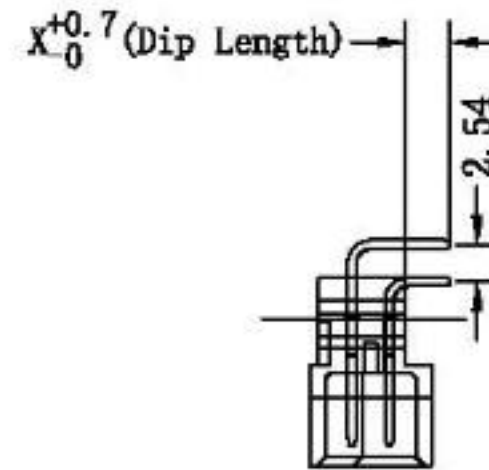


# HLAL Series

## DIN41612 B Type Male

Drawing NO. : DIN091

UNIT:mm

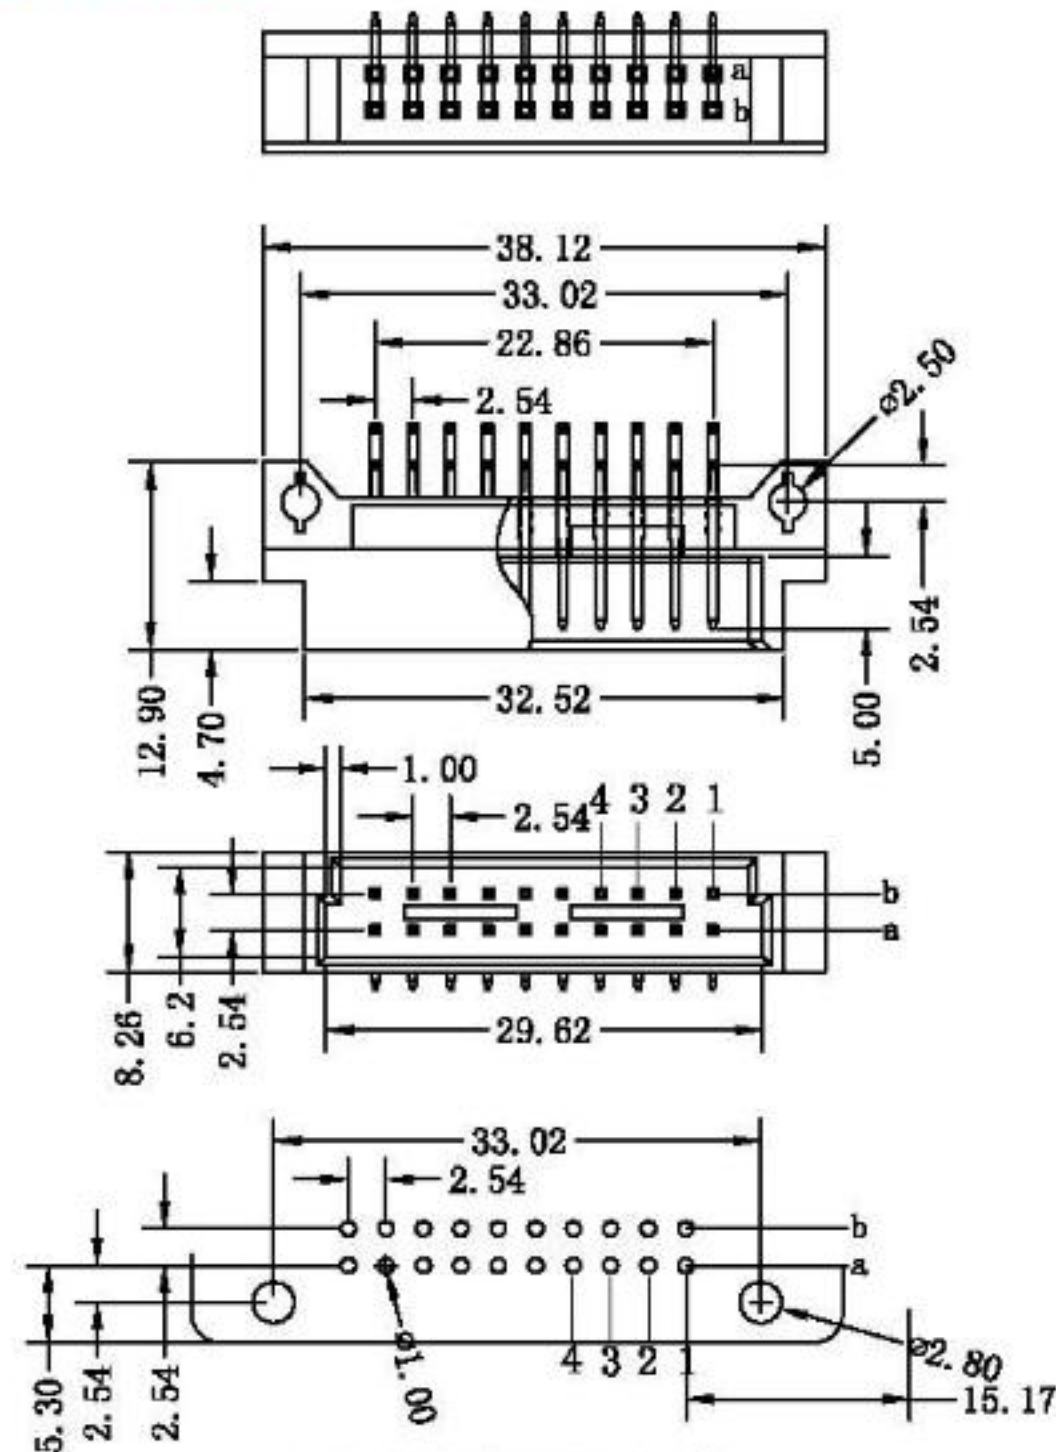

### MATERIAL:

Contacts: Brass  
Housing: PBT UL 94V-0

### ELECTRICAL CHARACTERISTICS:

Current Rating: 2 A  
Dielectric Withstanding Voltage: AC 1000V  
Insulator Resistance: 1000 M $\Omega$  min  
Contact Resistance: 30 m $\Omega$  max  
Operating Temperature: -55 $^{\circ}$  C ~ +105 $^{\circ}$  C

Pitch	Position	Rows with Contacts	Contact Arrange	Length	
				3.0	4.0
2.54mm	20	a b			
	10	a -			
5.08mm	10	a b			
	5	a -			

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Dip Type
HLAL-	*	1	*	*	*	*	D
DIN41612 B Type	3: 2.54 4: 5.08	1:Male	20 10 5	1: 3.0 2: 4.0	C: Dip Tin Contact Gold  G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15: 15u" 30: 30u"	Blank: Dip

Tel: 86-10- 57891098 MP :86-13001179378 or 13146881693

Mail: info@hlkpint. com or lucyliu0807 @163.com