
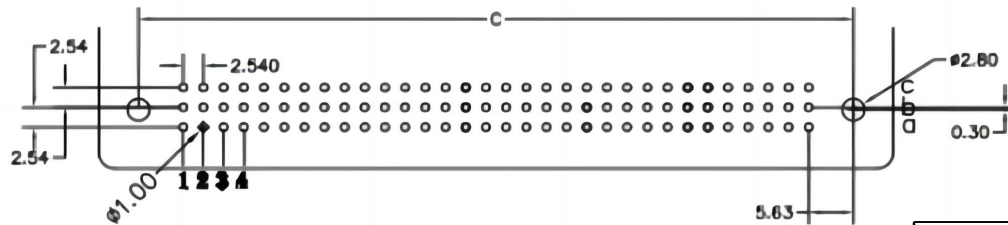
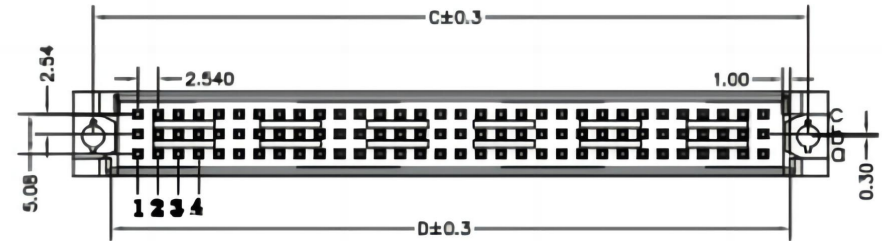
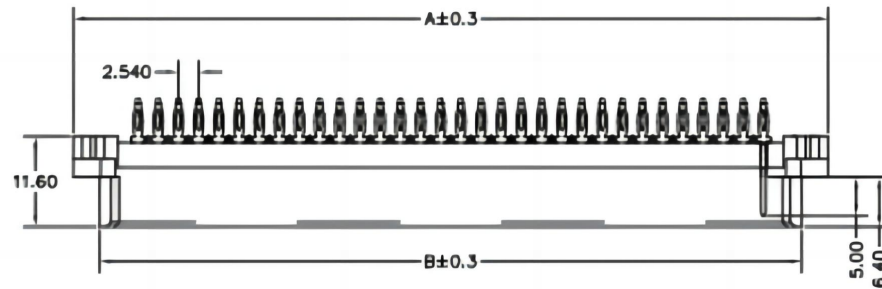


REV	DATE	DESCRIPTION
A		

MATERIAL:
Housing: PBT UL 94V-0
Contacts: Brass
ELECTRICAL:
Current rating: 2A
Contact resistance: 30mΩ max
Insulator resistance: 1000 MΩ min
Dielectric withstanding voltage: 1000V AC
Operating temperature: -55° C to +125° C

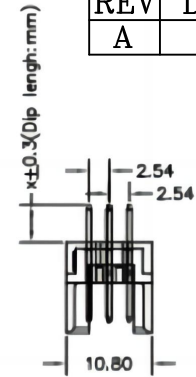

HLAL - * 3 * * * * P B
(Blank): without lock
Press Fit
00: G/F 02: 2u" 03: 3u"
05: 5u" 10: 10u" 15: 15u" 30: 30u"
C: Dip Tin Contact Gold
G: Gold

3: Male
Position:
5-96

Dip Length: (mm)
3: 15mm 4: 13mm 5: 17mm 6: 4.5mm

Pitch	Rows with Contacts	Contact Arrange
2.54mm	a b c	
	a b -	
	a - c	
	a - -	
5.08mm	a b c	
	a b -	
	a - c	
	a - -	

Position	A	B	C	D
30	39.12	32.52	34.12	29.62
48	54.36	47.76	49.36	44.86
96	95.0	88.4	90.0	85.5

UNIT : mm

Beijing Hongli Kunpeng
International Trade Co., LTD

MODEL NAME:
DIN41612 C Type 3 straight
male solderless

SELECT	1	2	3	EXTRA
TOL			✓	
DIM	0.000	0.05	0.05	0.10
	0.00	0.10	0.15	0.20
	0.0	0.15	0.25	0.30
	0.	0.25	0.30	0.40
ANGLE	1.0°	3.0°	5.0°	✓

PART NO. HLAL- *3***PB
APPROVED BY: FILE NO. DIN208
CHECKED BY: SCALE:
DRAW BY: 孙益民 DATE : 2022.9.25