


HLAL Series

DIN41612 C Type Female

Drawing NO. : DIN086

UNIT:mm

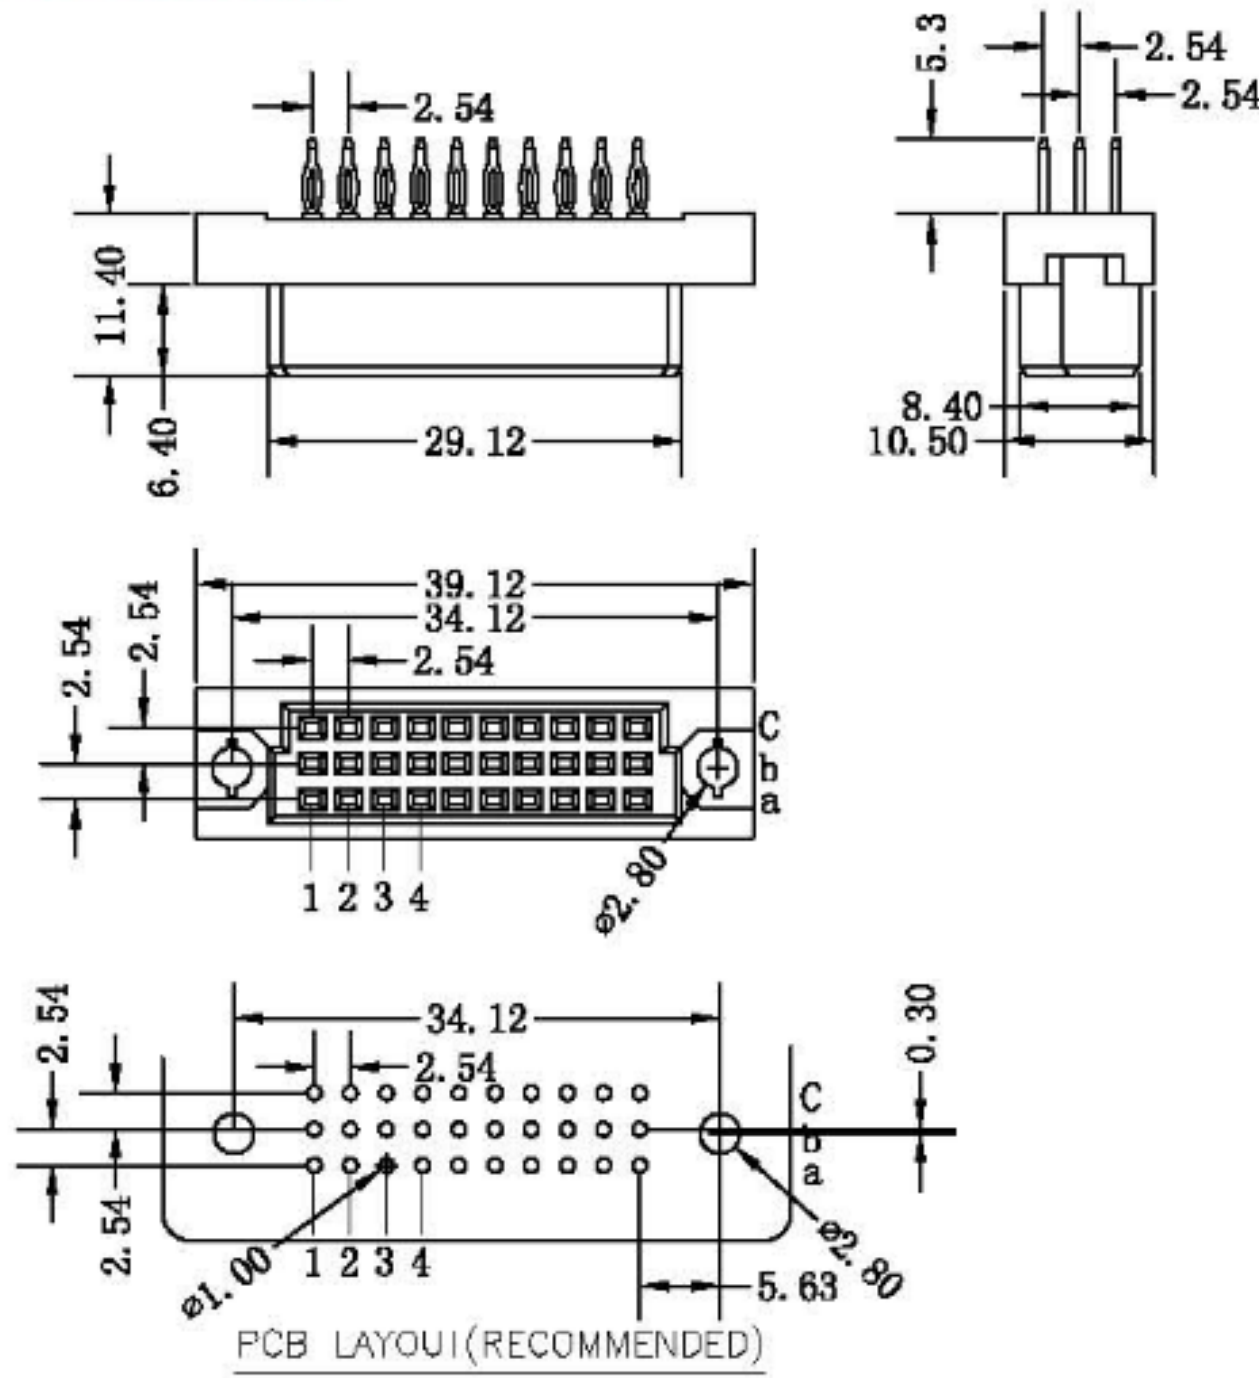

MATERIAL:

Contacts: Brass

Housing: PBT UL 94V-0

ELECTRICAL CHARACTERISTICS:

Current Rating: 2 A

Dielectric Withstanding Voltage: AC 1000V

Insulator Resistance: 1000 MΩ min

Contact Resistance: 30 mΩ max

Operating Temperature: -55° C ~ +105° C

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	30	a b c	
	20	a b -	
	20	a - c	
	10	a - -	
5.08mm	15	a b c	
	10	a b -	
	10	a - c	
	5	a - -	

ORDERING INFORMATION

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Press Fit Type
HLAL-	*	2	*	1	*	*	P
DIN41612 C Type	1: 2.54 2: 5.08	2:Female	30 20 15 10 5	1: 5.3	C: Dip Tin Contact Gold G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Press Fit

Tel: 86-10- 57891098 MP :86-13001179378 or 13146881693

Mail: info@hlpint. com or lucyliu0807 @163.com