


# HLAL Series

## DIN41612 B Type Female

Drawing NO. : DIN098

UNIT:mm

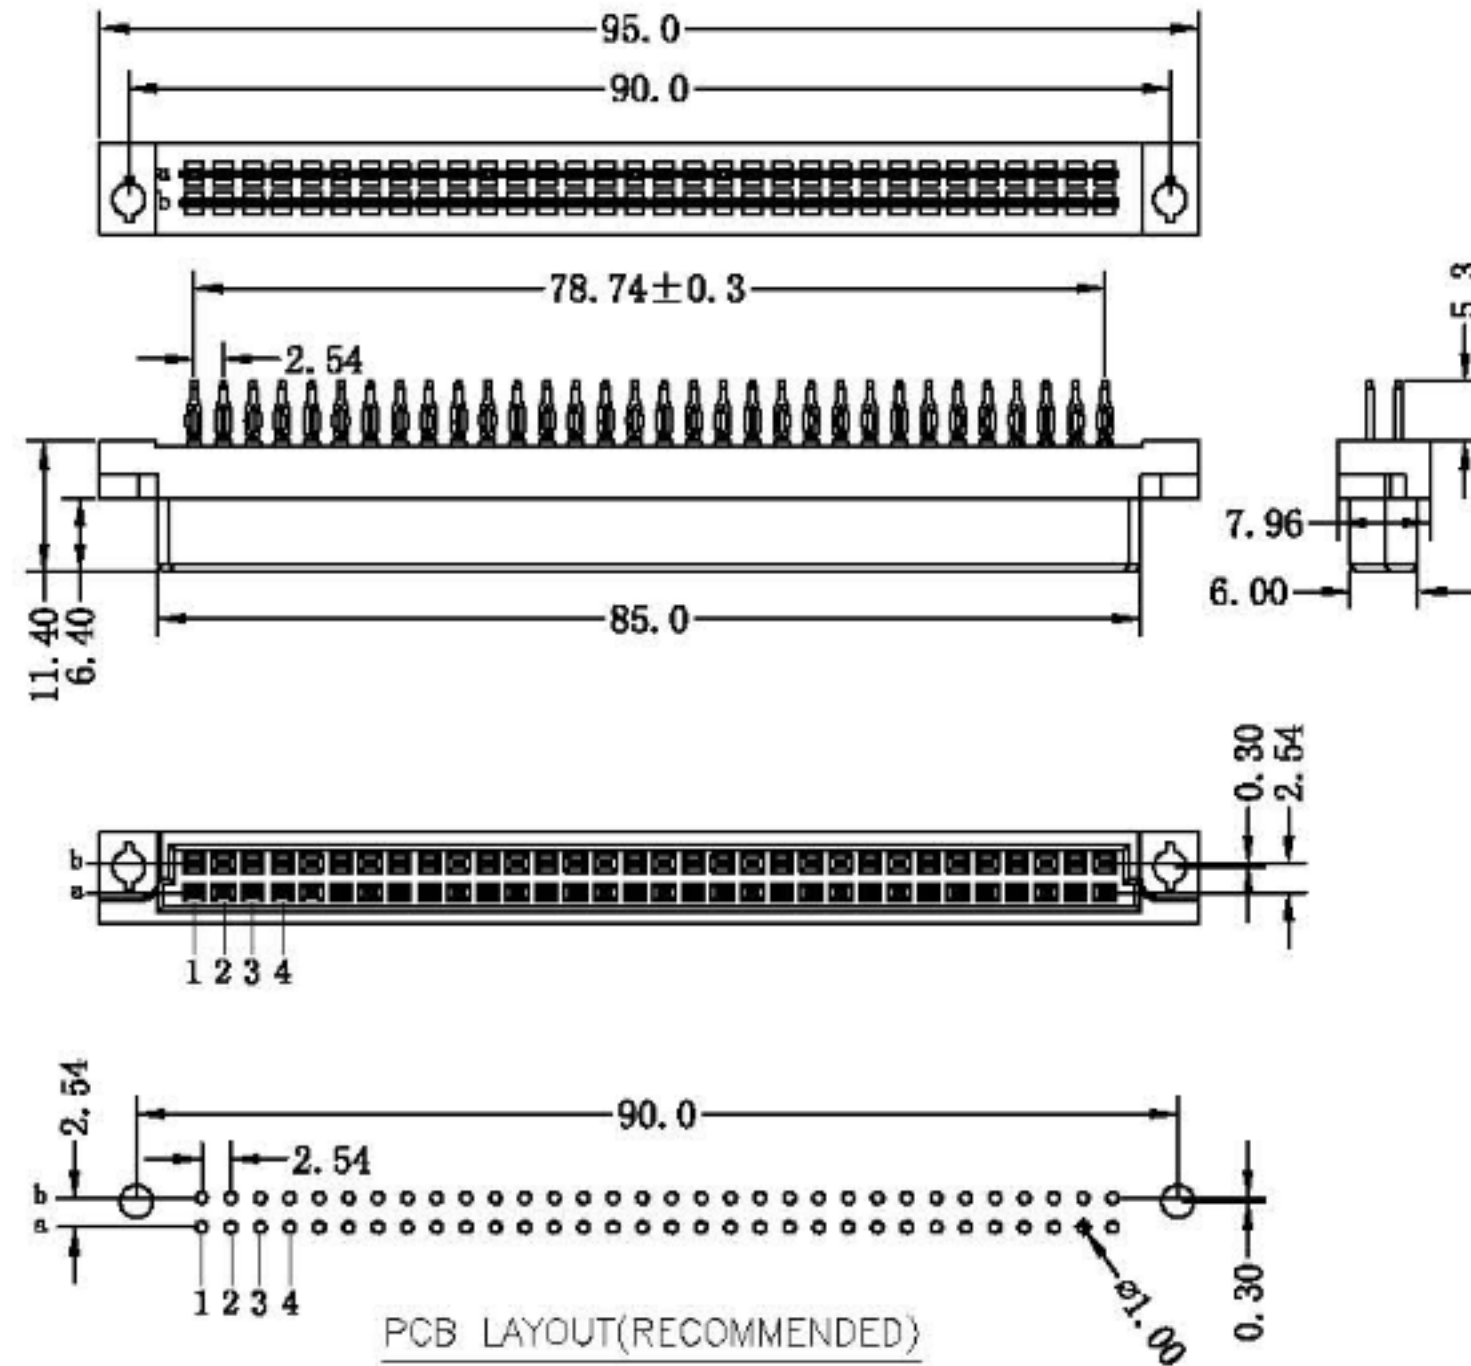

**MATERIAL:**

Contacts:Brass  
Housing:PBT UL 94V-0

**ELECTRICAL CHARACTERISTICS:**

Current Rating:2 A  
Dielectric Withstanding Voltage:AC 1000V  
Insulator Resistance:1000 MΩ min  
Contact Resistance:30 mΩ max  
Operating Temperature:-55° C~+105° C

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	64	a b	
	32	a -	
5.08mm	32	a b	
	16	a -	

**ORDERING INFORMATION**

Series N.O	Pitch(mm)	Contact Type	Position	Contact length(mm)	Contact Plating	Glod Plating	Press Fit Type
HLAL-	*	2	*	1	*	*	P
DIN41612 B Type	3: 2.54 4: 5.08	2:Female	64 32 16	1: 5.3	C: Dip Tin Contact Gold  G: Glod	00: G/F 02: 2u" 03: 3u" 05: 5u" 10: 10u" 15:15u" 30: 30u"	Press Fit

Tel: 86-10- 57891098 MP :86-13001179378 or 13146881693

Mail: info@hikpint. com or lucyliu0807 @163.com