



REV	DATE	DESCRIPTION
B	2023.11.6	

MATERIAL:  
Housing: PBT UL 94V-0  
Contacts: Brass  
ELECTRICAL:  
Current rating: 2A  
Contact resistance: 30mΩ max  
Insulator resistance: 1000 MΩ min  
Dielectric withstanding voltage: 1000V AC  
Operating temperature: -55° C to +125° C

HLAL - \* 2 \* \* \* \* D B  
1: 2.54mm 2: 5.08mm  
2: Male  
Position: 30 20 15 10 5  
Dip Length: (mm)  
1: 4.0 2: 13.0 3: 15.0 4: 17.0 5: 25.0  
D: Blank; without lock  
D: DIP  
00: G/F 02: 2u" 03: 3u"  
05: 5u" 10: 10u" 15: 15u" 30: 30u"  
C: Dip Tin Contact Gold  
G: Gold

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	30	a b c	
	20	a b -	
	20	a - c	
5.08mm	10	a - -	
	15	a b c	
	10	a b -	
	10	a - c	
	5	a - -	

UNIT : mm

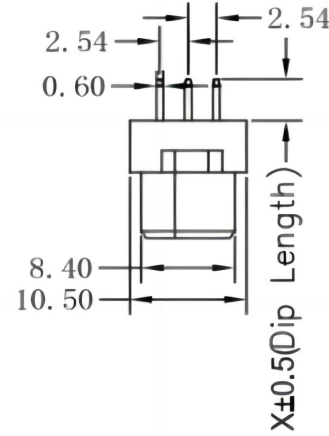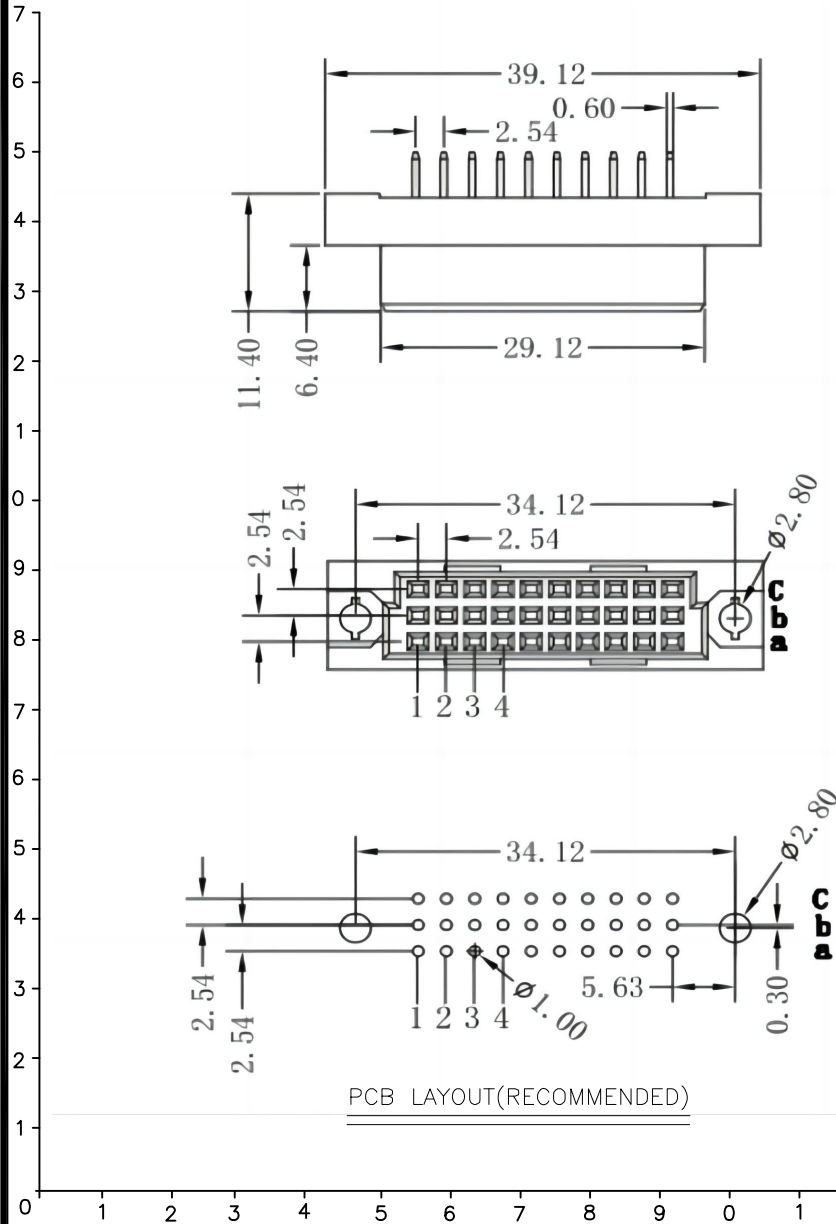

X±0.5(Dip Length)

Beijing Hongli Kunpeng  
International Trade Co., LTD

MODEL NAME:  
DIN41612 330 Straight  
female DIP Traditional type  
without harpoon

SELECT	TOL	1	2	3	EXTRA
DIM	0.000	0.05	0.05	0.10	
	0.00	0.10	0.15	0.20	✓
	0.0	0.15	0.25	0.30	✓
	0.	0.25	0.30	0.40	✓
ANGLE	1.0°	3.0°	5.0°		✓

PART NO. HLAL- \*2\*\*\*DB  
APPROVED BY:  
CHECKED BY:  
DRAW BY: jenny  
FILE NO. DIN076-30DB  
SCALE:  
DATE : 2010-6-18