
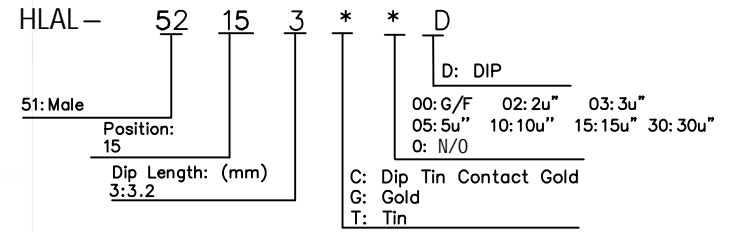
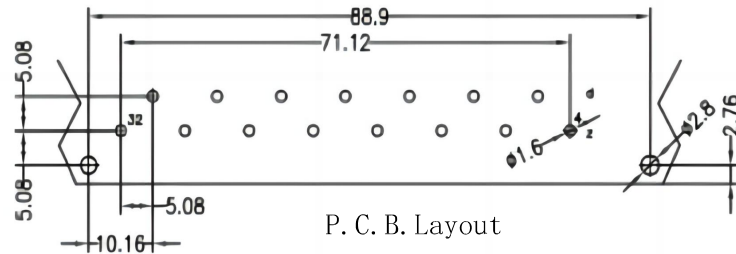
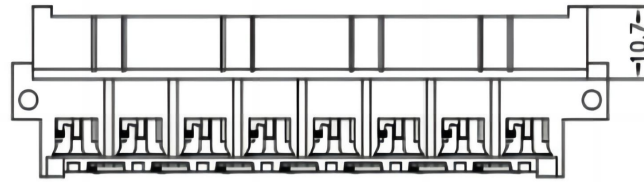

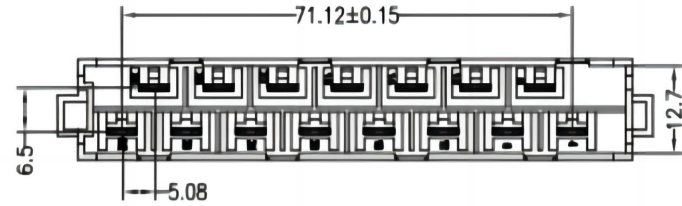


REV	DATE	DESCRIPTION

MATERIAL:
Housing: PBT UL 94V-0
Contacts: Phosphor Brass
ELECTRICAL:
Current rating: 15A
Contact resistance: 20mΩ max
Insulator resistance: 1000 MΩ min500 VDC
Dielectric withstanding voltage: 1000V AC
Operating temperature: -55° C to +125° C

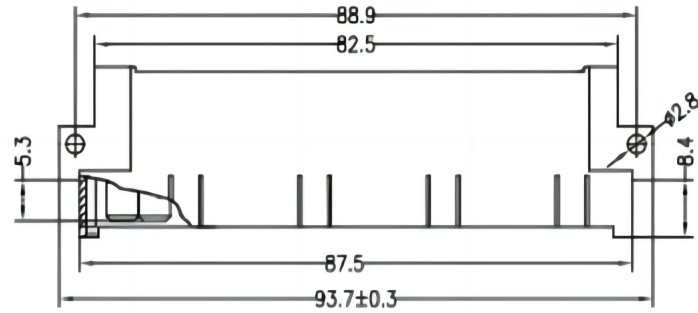

UNIT : mm

Beijing Hongli Kunpeng
International Trade Co., LTD

MODEL NAME:
DIN41612 High current 215
bend male H15

SELECT	1	2	3	EXTRA
DIM TOL	0.000	0.05	0.10	0.10
	0.00	0.10	0.15	0.20
	0.0	0.15	0.25	0.30
	0.	0.25	0.30	0.40
ANGLE	1.0°	3.0°	5.0°	

PART NO. HLAL-51153**D
APPROVED BY:
CHECKED BY:
DRAW BY: jenny
FILE NO. DIN309-46
SCALE:
DATE : 2021.8.7