
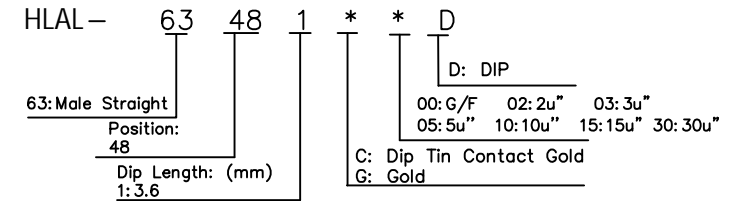
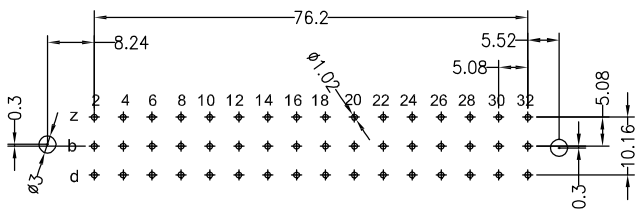
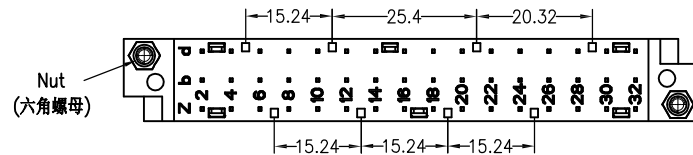

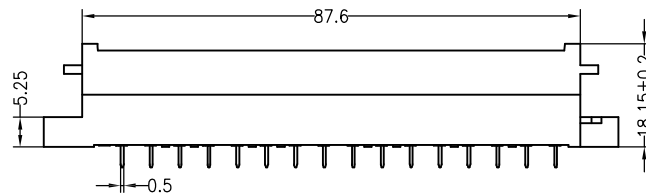


REV	DATE	DESCRIPTION
B	2024.1.4	

MATERIAL:
Housing: PBT UL 94V-0
Contacts: Brass
Max. processing Temp: 180° C for 30e-60seconds
(200° C for 10 seconds)

ELECTRICAL:
Current rating: 5.6A
Contact resistance: 20mΩ max
Insulator resistance: 1000 MΩ min
Dielectric withstanding voltage: 1000V AC minute
Operating temperature: -40° C to +105° C

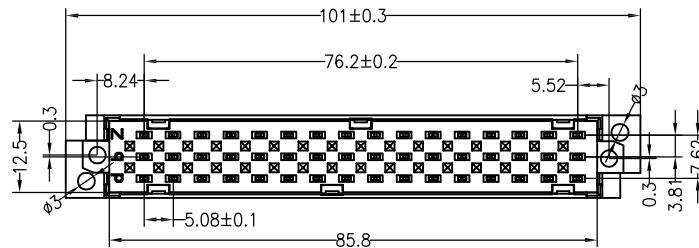

UNIT : mm

Beijing Hongli Kunpeng
International Trade Co., LTD

MODEL NAME:
DIN41612 high current 348
straight male

SELECT	1	2	3	EXTRA
DIM TOL	0.000	0.05	0.05	0.10
	0.00	0.10	0.15	0.20
	0.0	0.15	0.25	0.30
	0.	0.25	0.30	0.40
ANGLE	1.0°	3.0°	5.0°	

PART NO. HLAL-63481**D

APPROVED BY: FILE NO. DIN307-46

CHECKED BY: SCALE:

DRAW BY: jenny DATE : 2022. 8. 7