

**Ordering Information:**

C3030WRB-2xXP-9T - \*\*

1 2

1.Part NO.

2.Finish:

(blank):Tin over Nickel

G:Gold over Nickel(Au:1u")

G3:Gold over Nickel(Au:3u")

G15:Gold over Nickel(Au:15u",Mating Area)

G30:Gold over Nickel(Au:30u",Mating Area)

**SPECIFICATIONS:**

Current Rating: 12.5A AC,DC (Max.)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute




Pin Material: Brass

Terminal positioning strip:PET(White)

Housing Material: Nylon9T,UL94V-0(Black)

**Ordering Information & Dimensions**


Part NO.	Dimensions(mm)		
	A	B	C
C3030WRB-2x2P-9T	3.00	13.00	---
C3030WRB-2x3P-9T	6.00	16.00	---
C3030WRB-2x4P-9T	9.00	19.00	4.68
C3030WRB-2x5P-9T	12.00	22.00	7.68
C3030WRB-2x6P-9T	15.00	25.00	10.68
C3030WRB-2x7P-9T	18.00	28.00	13.68
C3030WRB-2x8P-9T	21.00	31.00	16.68
C3030WRB-2x9P-9T	24.00	34.00	19.68
C3030WRB-2x10P-9T	27.00	37.00	22.68
C3030WRB-2x11P-9T	30.00	40.00	25.68
C3030WRB-2x12P-9T	33.00	43.00	28.68

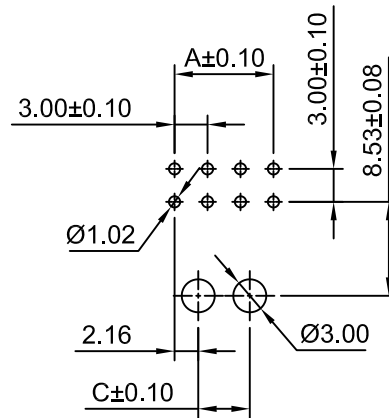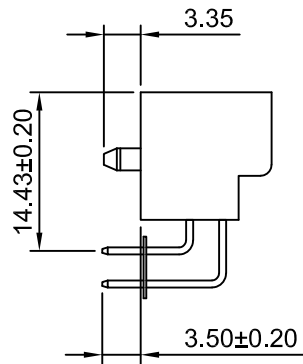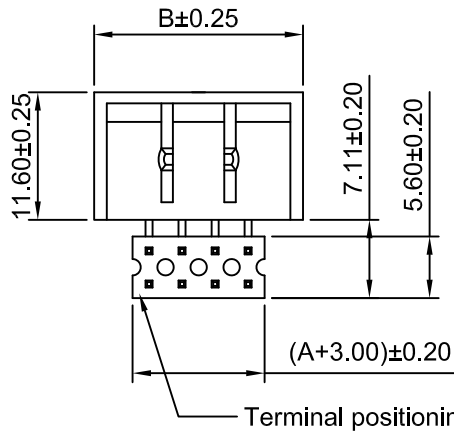


2x4P~2x9P

P.C.B LAYOUT  
TOLERANCE:±0.05

2x4P~2x9P



2x2P



2x3P

Beijing Hongli Kunpeng International Trade Co., Ltd.

A7	CHANGE THE INFORMATION	2022.01.17	Unit	Scale	Sheet	TITLE
A6	CHANGE THE INFORMATION	2020.08.18	mm	1.5:1	1 of 1	3.00mm PITCH RIGHT-ANGLE DUAL ROW DIP WAFER
A5	ADD THE SIZE	2020.06.30	DRWN	CHK'D	APPR	
A4	CHANGE TEH INFORMATION	2020.05.26	Xu Lei	Diankui Wan	Jack Yin	DRAWING NO.
A3	ADD THE SIZE OF PCBLAYOUT	2019.08.15	General Tolerances		THIRD ANGLE PROJECTION	HLB-30-WRB-2xXP 24
A2	ADD THE MATERIAL NYLON 6T	2019.04.30	x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		REV	
A1	CHANGE THE CURRENT RATING	2018.12.18				A7
A0	NEW RELEASE	2012.10.30				
REV	DESCRIPTION	DATE				

Unit Scale Sheet

1.5:1 1 of 1

DRWN CHK'D APPR

Xu Lei Diankui Wan Jack Yin

THIRD ANGLE PROJECTION

REV A7